

Converters
IndraDrive C
HCS02





Technical data

		HCS02.1E-W0012	HCS02.1E-W0028	HCS02.1E-W0054	HCS02.1E-W0070
Power					
Continuous current	[A]	4.5	12	20.6	28
Maximum current	[A]	11.5	28.3	54	70.8
Motor nominal power typ.	[kW]	1.5	4	7.5	11
Mains voltage	1 AC	200...250 V			
	3 AC	200...500 V			
Tolerances	[%]	± 10 %			
Frequency		50...60 Hz			
Frequency tolerances	[Hz]	± 2 Hz			
Continuous input mains current	[A]	6	13	20	30
Dependence of output on mains voltage	$U_{LN} < 400 \text{ V}$	1 % power reduction per 4 V			
	$U_{LN} > 400 \text{ V}$	1 % power gain per 5 V			
Mains contactor		external			
DC bus					
Continuous output with choke	[kW]	2.1	5.1	10	14
Max. output with choke	[kW]	5	10	16	19
Continuous output without choke	[kW]	2.1	5.1	7	9
Max. output without choke	[kW]	5	8	12	14
Switching frequency/max. output frequency	4 kHz	0...400 Hz			
	8 kHz	0...800 Hz			
	12 kHz	0...1200 Hz			
	16 kHz	0...1600 Hz			
Output voltage	[V]	3 x AC 0...main voltage V			
DC bus capacity	[mF]	0.135	0.27	0.54	0.675
DC bus voltage	[V] DC	Main voltage x 1,41			
Converter/inverter combination		●			
Brake chopper / resistor					
Brake resistor		Internal		internal/external	
Brake chopper		Internal			

Converters

IndraDrive C ■ HCS02


Braking Energy Consumption	[kWs]	1	5	9	13
Continuous braking power	[kW]	0.05	0.15	0.35	0.5
Maximum braking power	[kW]	4	10	18	25
Control Voltage					
Control Voltage	external	24V ± 20%			
	Internal	24V ± 10%			
Power consumption without control unit and motor brake	[W]	12	14	23	
Protection					
Category Total	IP20 (IEC529)				
Degree of contamination	2 (EN50178)				
EMC	EN61800-3				
Cooling system	forced ventilated				
Standards					
Certification	EN61800-5-1UL 508 C-				
	Canadian National Standard(s) C22.2 No. 14-05--				
Weight					
Weight	[kg]	2.9	3.8	6.7	6.8
Ambient conditions					
Ambient temp. operation	[°C]	0 ... 40 °C			
	Derating [°C]	0 ... 55 °C			
Ambient temp. storage	[°C]	-25...55 °C			
Relative humidity operation	[%]	5...95 %			
Relative humidity storage	[%]	5...95 %			
Installation height	[m]	1000			
	Derating [m]	4000			

All data for nominal rating at 3 AC 400 V mains voltage and 4 kHz switching frequency

Dimensions

Converters

IndraDrive C ■ HCS02

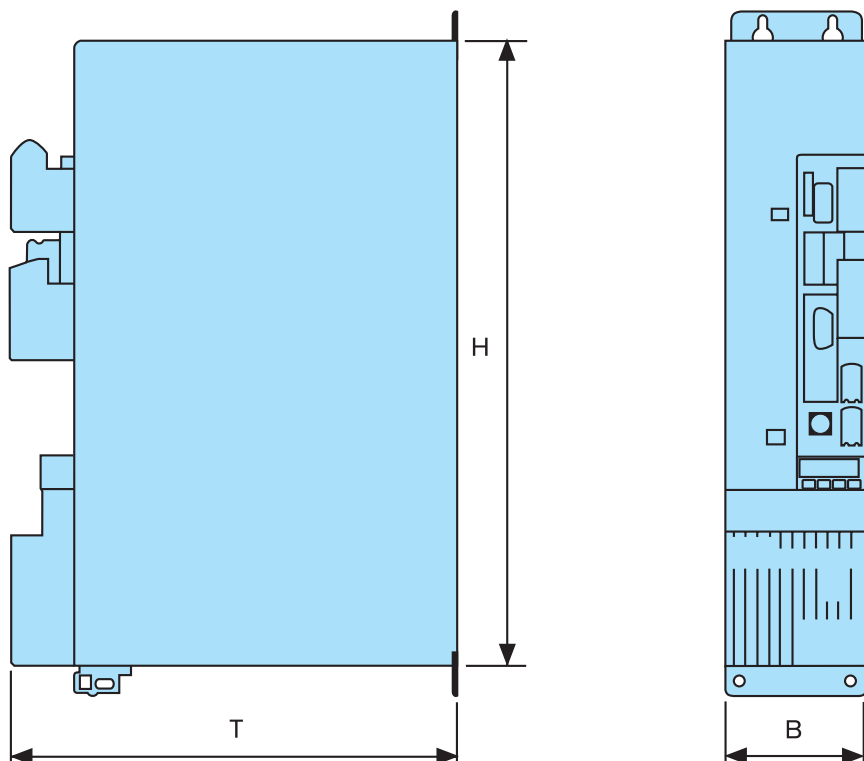

		HCS02.1E-W0012	HCS02.1E-W0028	HCS02.1E-W0054	HCS02.1E-W0070
Dimensions					
Dimensions (H x W x D)		290 x 65 x 206 mm	352 x 65 x 206 mm	352 x 105 x 206 mm	352 x 105 x 206 mm
Height H	[mm]	290	352	352	352
Width W	[mm]	65	65	105	105
Depth D	[mm]	206	206	206	206

Components

Control units

Description	Page	Details
Control units	Single-axis	ADVANCED
Control units	Single-axis	BASIC ANALOG
Control units	Single-axis	BASIC OPEN LOOP
Control units	Single-axis	BASIC PROFIBUS
Control units	Single-axis	BASIC SERCOS
Control units	Single-axis	BASIC UNIVERSAL

Accessories

Converters

IndraDrive C ■ HCS02

Auxiliary components

Description		
Accessories	Brake units	HLB
Accessories	Brake resistor	HLR
Accessories	Motor filters	HMF
Accessories	Mains chokes	HNL
Accessories	Main filters	HNF
Accessories	Capacity modules	HLC

Representante oficial de:

Rexroth
Bosch Group

[Argentina]



Calle 49 N° 5764 - Villa Ballester (B1653AOX) - Prov. de Buenos Aires - ARGENTINA
Tel: (+54 11) 4768-4242 / Fax: (+54 11) 4849-1212
Mail: ventas@nakase.com.ar / Web: www.nakase.com.ar

