
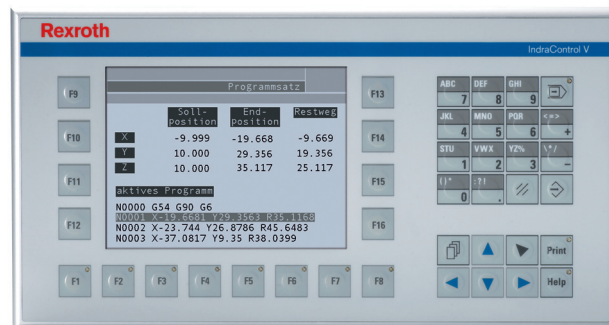


compact operator terminals

5,7" FSTN-Display. IndraControl VCP 20

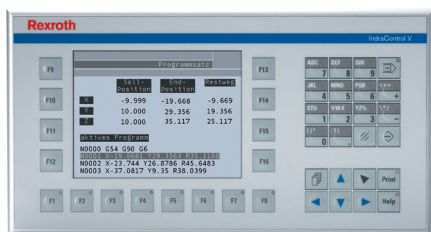

compact operator terminals

5,7" FSTN-Display. ■ IndraControl VCP 20**Documentation****Technical data**

		VCP 20.2
Processor		
CPU	RISC ARM9 200MHz (Standard)	
Memory		
Application	3 MB	
Flash size	16 MB	
Slot	1	
Display		
Type	FSTN	
	graphic orientated	
Size	5.7 "	
Colours / Greyscales	grey tones	
Resolution	320 x 240	
Handling		
Type	keyboard operation	
Handling	Function keys	
... with LED	8	
System Keys	24	
... with LED	3	
Keyboard		
Keyboard	Function keys	
Interfaces		
Ethernet	1 x Ethernet TCP/IP (Standard)	
USB	2 x USB-Host (Standard)	
Others	RS232/RS485 (Option)	
Fieldbus		
PROFIBUS DP	1 x PROFIBUS DP-Slave (Option)	
Electric data		
Voltage supply	U	24 V DC

compact operator terminals

5,7" FSTN-Display. ■ IndraControl VCP 20

Min.	U_{min}	19 V DC
Max.	U_{max}	30 V DC
Input Power	[W]	6
Protection		
Category Front		IP65
Category Rear		IP20
Weight		
Weight		1,3 kg
Ambient conditions		
Ambient temp. operation	Min. [°C]	5
	Max. [°C]	45
Ambient temp. storage	Min. [°C]	-20
	Max. [°C]	60
Relative humidity operation	Min. [%]	5
	Max. [%]	85
Relative humidity storage	Min. [%]	5
	Max. [%]	75
Atmospheric pressure (operation)	Min. [kPa]	80
	Max. [kPa]	106
	EN 60034-1	(up to 2,000 above MSL)
Atmospheric pressure (transport/storage)	Min. [kPa]	70
	Max. [kPa]	106
	EN 60034-1	(up to 2,000 above MSL)

Dimensions

		VCP 20.2
Dimensions		
Height H	[mm]	160
Width W	[mm]	300
Depth D	[mm]	55

Representante oficial de:

Rexroth
Bosch Group

[Argentina]



Calle 49 N° 5764 - Villa Ballester (B1653AOX) - Prov. de Buenos Aires - ARGENTINA
Tel: (+54 11) 4768-4242 / Fax: (+54 11) 4849-1212
Mail: ventas@nakase.com.ar / Web: www.nakase.com.ar

