

MOSA M12 female straight field-wireable (IDC) Slimline; 0,34-0,5qmm; 5-pol.

Female straight

5-pole

Connection diameter: 0.34...0.5 mm²

Image



Vicarious picture

Approvals



Form

12593

Technical Data

Operating voltage	max. 50 V AC/DC
Operating current per contact (40 °C)	max. 4 A
Connection diameter	0.34...0.5 mm ² (conductor diameter \geq 0.1 mm)
Clamping range (cable diameter)	4.7...6 mm
Wire isolation	PVC, PP
Outer wire diameter	1.2...2.0 mm
Protection	IP65 and IP67 when plugged and screwed down (EN 60529)
Temperature range	-25...+85 °C

Commercial data

Net weight	28
Net weight	28
Weight unit	gram
Basic unit	pc.
Customs tariff number	85369010
Unit (piece)	1
Limited value	1

Comments


The resistance to aggressive media should be individually tested for your application. Further details on request.

All data on this data sheet was compiled carefully.


Liability regarding correctness, completeness, and actuality is limited to gross negligence. Created: 06/12

Contact layout

Female

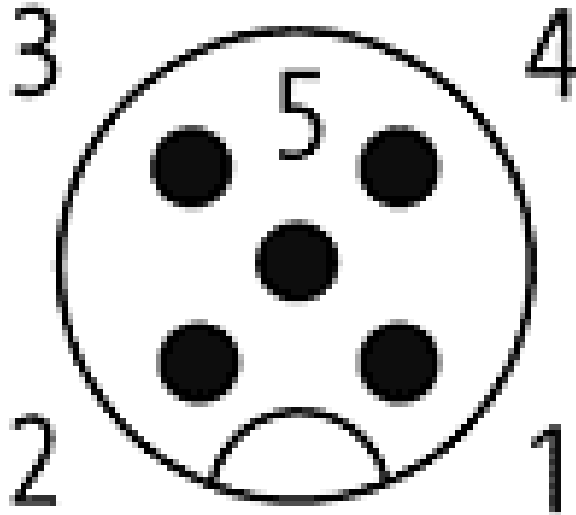

Circuit diagram

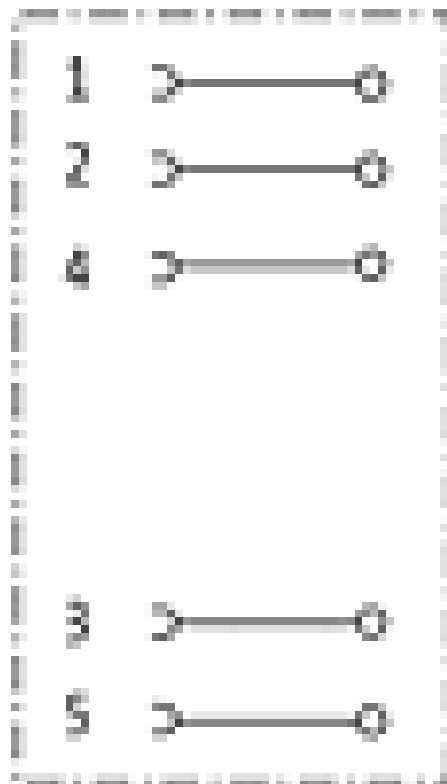

Representante oficial de:



[Argentina – Uruguay – Paraguay – Bolivia – Colombia – y Perú.]



Calle 49 N° 5764 - Villa Ballester (B1653AOX) - Prov. de Buenos Aires - ARGENTINA
Tel: (+54 11) 4768-4242 / Fax: (+54 11) 4849-1212
Mail: ventas@nakase.com.ar / Web: www.nakase.com.ar

