

M12 male 90° field-wireable Replaced Art.-No. 27616

Male 90°

4-pole

Clamping range cable entry: 6...8 mm

Image

Vicarious picture

Approvals**Express shipments****Form**

12861

Technical Data

Operating voltage	max. 250 V AC/DC
Operating current per contact (40 °C)	max. 4 A
Connection diameter	max. 0.75 mm ²
Clamping range (cable diameter)	6...8 mm
Protection	IP65 and IP67 when plugged and screwed down (EN 60529)
Temperature range	-25...+85 °C

Commercial data

Net weight	22
Net weight	22
Weight unit	gram
Basic unit	pc.
Customs tariff number	85369010
Unit (piece)	1
Limited value	1

Comments

Plastic housings with good resistance against chemicals and oils.


The resistance to aggressive media should be individually tested for your application. Further details on request.

All data on this data sheet was compiled carefully.


Liability regarding correctness, completeness, and actuality is limited to gross negligence. Created: 06/12

Contact layout

Male

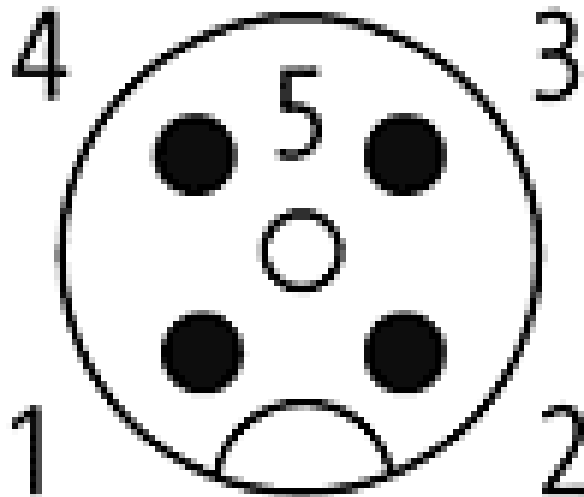

Circuit diagram

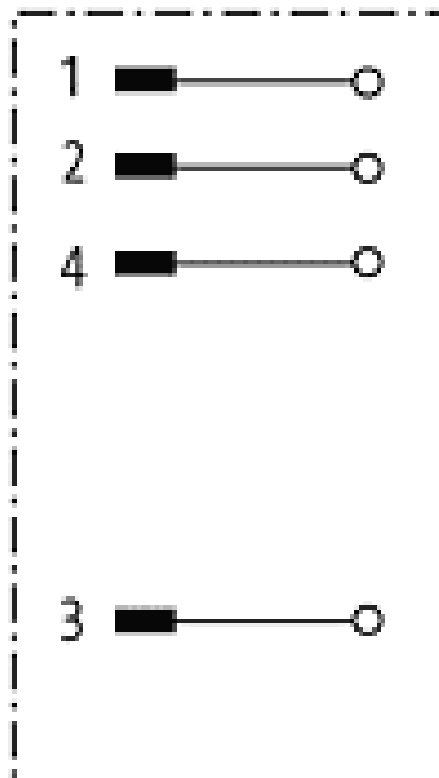

Dimension drawing

