

**M12 female straight self-wireable 8-pol. screw termination**

Female straight  
8-pole  
Clamping range cable entry: 6...8 mm

**Image**

Vicarious picture

**Approvals****Express shipments****Form**

17321

**Technical Data**

Operating voltage	max. 60 V AC/DC
Operating current per contact (40 °C)	max. 1,76A
Connection diameter	max. 0.5 mm <sup>2</sup>
Clamping range (cable diameter)	6...8 mm
Protection	IP65 and IP67 when plugged and screwed down (EN 60529)
Temperature range	-25...+85 °C

**Commercial data**


Net weight	55
Net weight	55
Weight unit	gram
Basic unit	pc.
Customs tariff number	85369010
Unit (piece)	1
Limited value	1

**Comments**


Plastic housings with good resistance against chemicals and oils.  
The resistance to aggressive media should be individually tested for your application. Further details on request.

Contact layout


# Female

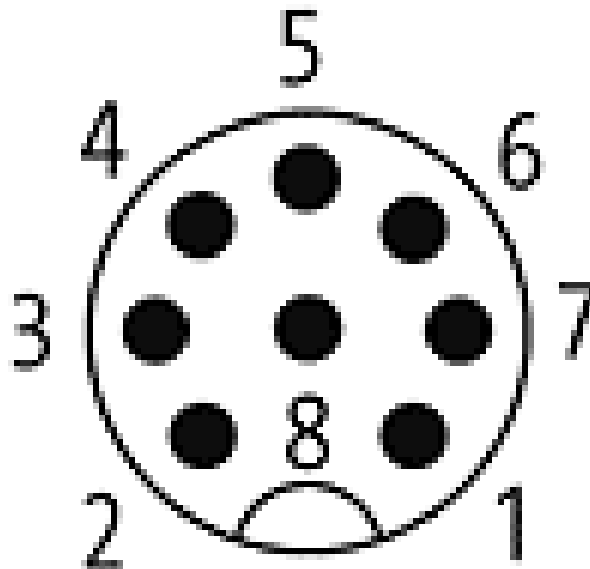

Circuit diagram

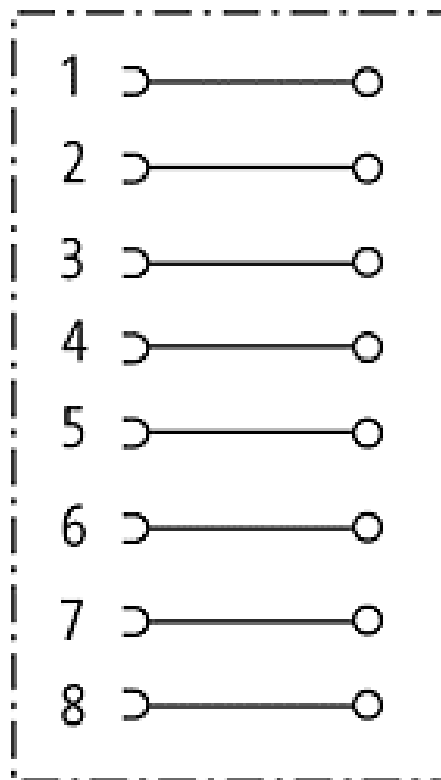

Dimension drawing

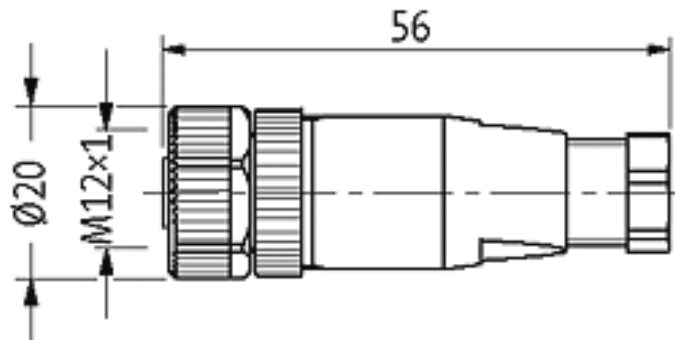

Representante oficial de:



[Argentina – Uruguay – Paraguay – Bolivia – Colombia – y Perú.]



Calle 49 N° 5764 - Villa Ballester (B1653AOX) - Prov. de Buenos Aires - ARGENTINA  
Tel: (+54 11) 4768-4242 / Fax: (+54 11) 4849-1212  
Mail: [ventas@nakase.com.ar](mailto:ventas@nakase.com.ar) / Web: [www.nakase.com.ar](http://www.nakase.com.ar)

