


M16 male, 90°, open end 2m PUR cable 8x0,25/2x0,5

Male 90°
14-pole
12-pole used

Image

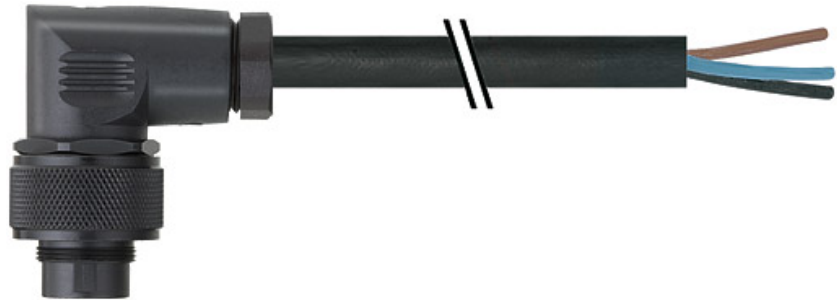

Vicarious picture


Form	16851
Technical Data	
Operating voltage	24 V AC/DC
Operating current per contact (40 °C)	max. 3 A
Protection	IP65 and IP67 when plugged and screwed down (EN 60529)
Locking of ports	
Temperature range	-25...+85 °C, depending on cable quality
Cable	
No./diameter of wires	8 × 0.25 + 2 × 0.5 mm ²
Wire isolation	PVC
C-track properties	yes
Jacket	PUR/PVC
Outer diameter	approx. 8.0 mm
Bend radius (mobile)	15 × outer diameter
Temperature range (fixed)	-25...+70 °C
Temperature range (mobile)	-5...+70 °C
Commercial data	
Net weight	207
Net weight	207
Weight unit	gram
Basic unit	pc.
Customs tariff number	85444290
Unit (piece)	1
Limited value	1
Comments	Further cable lengths on request.

All data on this data sheet was compiled carefully.

Liability regarding correctness, completeness, and actuality is limited to gross negligence. Created: 06/12

Contact layout

Male

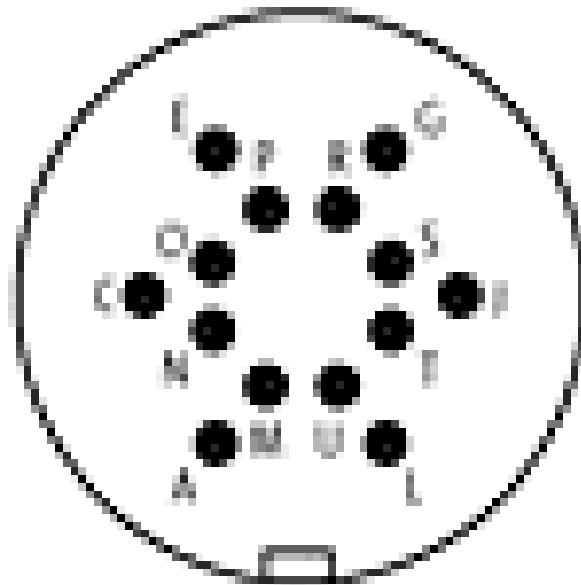

Circuit diagram

P	■	white
J	■	green
T	■	yellow
S	■	gray
G	■	pink
R	■	red
E	■	black
O	■	violet
A	■	brown 0.75 mm ²
M	■	
L	■	blue 0.75 mm ²
U	■	

Representante oficial de:



[Argentina – Uruguay – Paraguay – Bolivia – Colombia – y Perú.]



Calle 49 N° 5764 - Villa Ballester (B1653AOX) - Prov. de Buenos Aires - ARGENTINA
Tel: (+54 11) 4768-4242 / Fax: (+54 11) 4849-1212
Mail: ventas@nakase.com.ar / Web: www.nakase.com.ar

