

M23 female straight, 12-pole, with open ended cable 5m PUR 6x0,34/3x0,75

Female straight
12-pole
9-pole used
for 6-way distribution box, 4-pole

Image

Vicarious picture


Form	23031
Technical Data	
Operating voltage	125 V AC/DC
Operating current per contact (40 °C)	max. 7.5 A
Protection	IP65 and IP67 when plugged and screwed down (EN 60529)
Locking of ports	Screw thread M23 × 1 mm
Temperature range	-25...+85 °C, depending on cable quality
Cable	
No./diameter of wires	6 × 0.34 + 3 × 0.75 mm ²
Wire isolation	PVC (bl, wh, gn, ye, gr, pk, rd, gnye, br)
C-track properties	yes
Jacket	PUR/PVC
Outer diameter	approx. 9.1 mm
Bend radius (mobile)	12 × outer diameter
Temperature range (fixed)	-30...+80 °C
Temperature range (mobile)	-5...+70 °C
Commercial data	
Net weight	700
Net weight	700
Weight unit	gram
Basic unit	pc.
Customs tariff number	85444290
Unit (piece)	1
Limited value	1

Comments	Further cable lengths on request. Plastic housings with good resistance against chemicals and oils. The resistance to aggressive media should be individually tested for your application. Further details on request.
-----------------	--

All data on this data sheet was compiled carefully.
Liability regarding correctness, completeness, and actuality is limited to gross negligence. Created: 06/12

Contact layout

Female

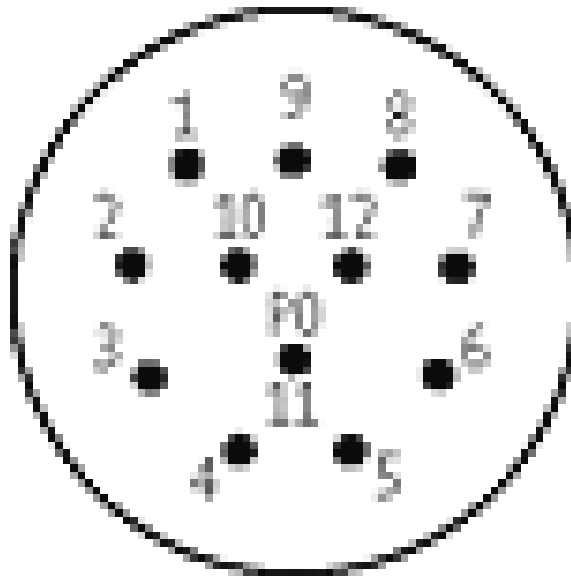

Circuit diagram

1	▷	white
2	▷	green
3	▷	yellow
4	▷	gray
5	▷	pink
6	▷	red
11	▷	brown 0.75 mm ²
9	▷	blue 0.75 mm ²
12	▷	green / yellow 0.75 mm ²

Representante oficial de:



[Argentina – Uruguay – Paraguay – Bolivia – Colombia – y Perú.]



Calle 49 N° 5764 - Villa Ballester (B1653AOX) - Prov. de Buenos Aires - ARGENTINA
Tel: (+54 11) 4768-4242 / Fax: (+54 11) 4849-1212
Mail: ventas@nakase.com.ar / Web: www.nakase.com.ar

