

M23 female straight, 19-pole, with open ended cable 5m PUR/PVC 8x0,34/3x0,75

Female straight
19-pole
11-pole used
for 4-way distribution boxes, 5-pole

Image

Vicarious picture

Form

23211

Technical Data

Operating voltage	125 V AC/DC
Operating current per contact (40 °C)	max. 7.5 A
Protection	IP65 and IP67 when plugged and screwed down (EN 60529)
Locking of ports	Screw thread M23 × 1 mm
Temperature range	-25...+85 °C, depending on cable quality

Cable

No./diameter of wires	8 × 0.34 + 3 × 0.75 mm ²
C-track properties	2 Mio.
Jacket	PUR/PVC
Outer diameter	approx. 8.1 mm
Bend radius (mobile)	12 × outer diameter
Temperature range (fixed)	-30...+80 °C
Temperature range (mobile)	-5...+70 °C

Commercial data

Net weight	708
Net weight	708
Weight unit	gram
Basic unit	pc.
Customs tariff number	85444290
Unit (piece)	1
Limited value	1


Comments

Further cable lengths on request.
Plastic housings with good resistance against chemicals and oils.
The resistance to aggressive media should be individually tested for your application. Further details on request.

All data on this data sheet was compiled carefully.
Liability regarding correctness, completeness, and actuality is limited to gross negligence. Created: 06/12

Contact layout

Female

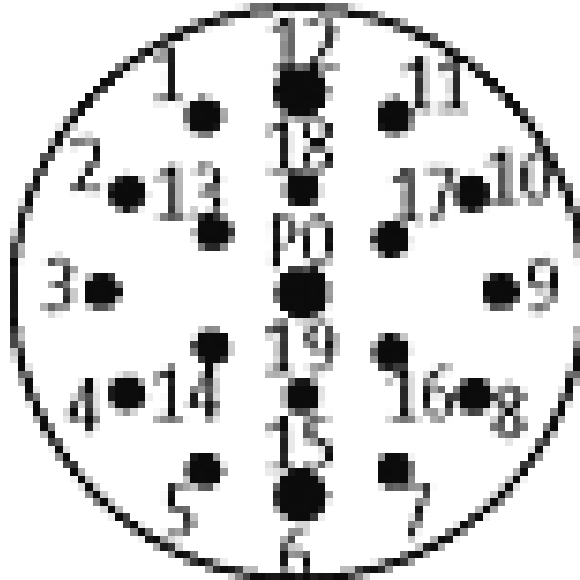

Circuit diagram

15	▷	white
7	▷	gray/pink
5	▷	green
4	▷	red/blue
16	▷	yellow
8	▷	white/green
3	▷	gray
14	▷	brown/green
19	▷	brown 0.75 mm ²
6	▷	blue 0.75 mm ²
12	▷	green/yellow 0.75 mm ²

Representante oficial de:



[Argentina – Uruguay – Paraguay – Bolivia – Colombia – y Perú.]



Calle 49 N° 5764 - Villa Ballester (B1653AOX) - Prov. de Buenos Aires - ARGENTINA
Tel: (+54 11) 4768-4242 / Fax: (+54 11) 4849-1212
Mail: ventas@nakase.com.ar / Web: www.nakase.com.ar

