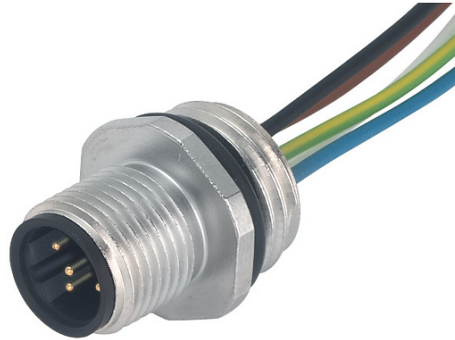


M12-Flanschst.B-cod 1-2-3-4-5 975 0,2mLi

Flange M12 male
with multi-strand wire
B-coded, 5-pole

Image

Vicarious picture

Bus technologies**Form**

14121

Technical Data

Operating voltage	250 V AC/DC
Operating current per contact (40 °C)	max. 4 A
Connection	pre-wired with TPE-wire isolation
Connection diameter	0.25 mm ²
Protection	IP65 and IP67 when plugged and screwed down (EN 60529)
Temperature range	-25...+85 °C

Commercial data


Net weight	16
Net weight	16
Weight unit	gram
Basic unit	pc.
Customs tariff number	85444290
Unit (piece)	1
Limited value	1

All data on this data sheet was compiled carefully.

Liability regarding correctness, completeness, and actuality is limited to gross negligence. Created: 06/12

Contact layout

Male

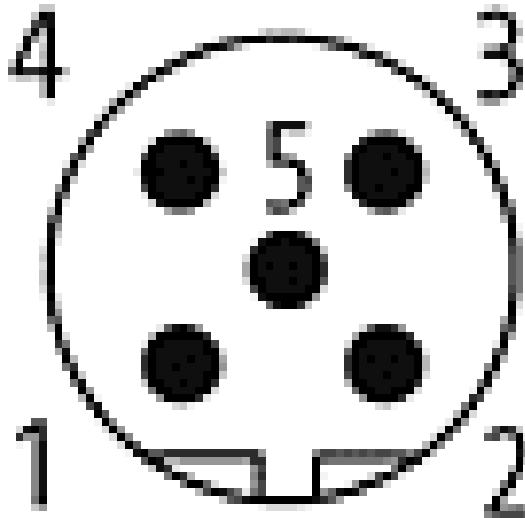

Representante oficial de:



[Argentina – Uruguay – Paraguay – Bolivia – Colombia – y Perú.]



Calle 49 N° 5764 - Villa Ballester (B1653AOX) - Prov. de Buenos Aires - ARGENTINA
Tel: (+54 11) 4768-4242 / Fax: (+54 11) 4849-1212
Mail: ventas@nakase.com.ar / Web: www.nakase.com.ar

