

Exact12, 8xM12, 5-pole, basic housing, NPN-LED without homerun-cable

8-way, 5-pole
Form NPN
Screw plug-in terminals

Image



Vicarious picture

Approvals



Contact layout

| | |
|-------------|---|
| Contact 1 | (+) |
| Contact 2 | (N/C)/(S2) |
| Contact 3 | (-) |
| Contact 4 | (N/O)/(S1) |
| Contact 5 | (Earth) |
| LED display | LED (green): Power LED (yellow): signal (S1) LED (white): Signal (S2) |

Technical Data

| | |
|---------------------------------------|--|
| Operating voltage | 24 V DC |
| Operating current per contact (40 °C) | max. 4 A |
| Total current | max. 8 A |
| Housing | Plastic, flame retardant |
| Protection | IP65 and IP67 when plugged and screwed down (EN 60529) |
| Temperature range | -20...+60 °C |

Technical data M12 port

| | |
|------------------|-------------------------|
| Locking of ports | Screw thread M12 × 1 mm |
|------------------|-------------------------|

All data on this data sheet was compiled carefully.

Liability regarding correctness, completeness, and actuality is limited to gross negligence. Created: 06/12


Commercial data

| | |
|-----------------------|----------|
| Net weight | 127 |
| Net weight | 127 |
| Weight unit | gram |
| Basic unit | pc. |
| Customs tariff number | 85369010 |
| Unit (piece) | 1 |
| Limited value | 1 |


Comments

Plastic housings with good resistance against chemicals and oils.
The resistance to aggressive media should be individually tested for your application. Further details on request.


Contact layout

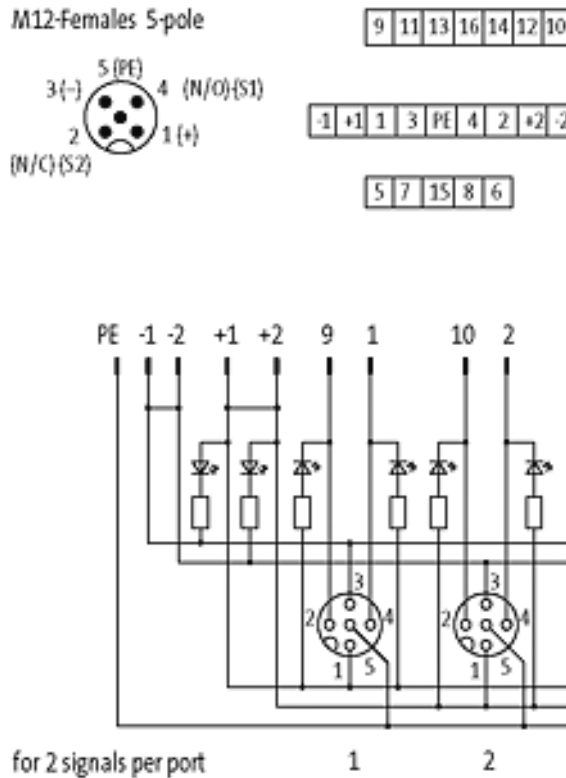


Circuit diagram

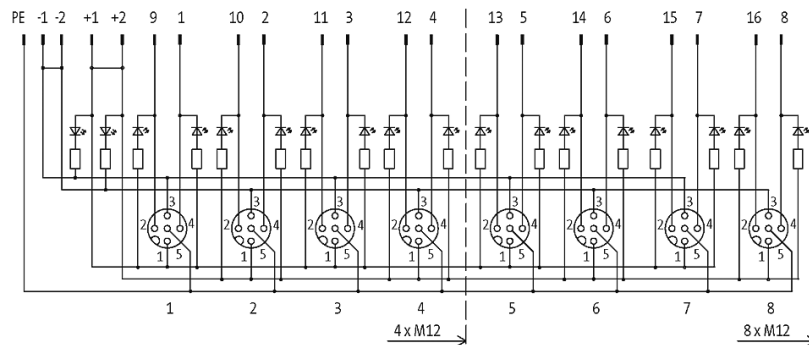

Dimension drawing

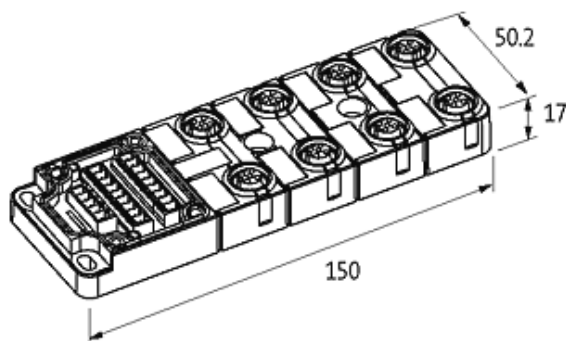

De-rating curve

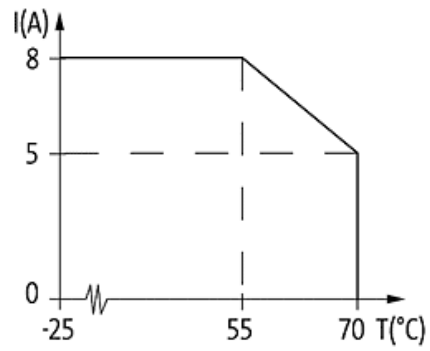

Representante oficial de:



[Argentina – Uruguay – Paraguay – Bolivia – Colombia – y Perú.]



Calle 49 N° 5764 - Villa Ballester (B1653AOX) - Prov. de Buenos Aires - ARGENTINA
Tel: (+54 11) 4768-4242 / Fax: (+54 11) 4849-1212
Mail: ventas@nakase.com.ar / Web: www.nakase.com.ar

