

**Exact8, NPN, 8-way with pre-wired homerun cable**

8-way, 3-pole  
for NPN signals 24 V DC

**Image**

Vicarious picture

**Approvals****Contact layout**

Contact 1	(+)
Contact 3	(-)
Contact 4	(N/O)/(S1)
LED display	LED (green): Power    LED (yellow): signal (S1)

**Form**

88011

**Technical Data**

Operating voltage	24 V DC
Operating current per contact (40 °C)	max. 1,76A
Signal per port	1
Total current	max. 10 A
Protection	IP65 and IP67 when plugged and screwed down (EN 60529)
Housing	Plastic, flame retardant
Temperature range	-20...+80 °C, depending on cable quality

**You can chose from the following variants:**

	<b>Art.-No.</b>
Exact8, 8xM8, 3-pole, moulded cable 5.0m PUR/PVC 8x0,34+2x0,75 NPN-LED's	8000-88011-3570500
	8000-88011-3571000
Exact8, 8xM8, 3-pole, moulded cable 5.0m PUR 8x0,34+2x0,75 NPN-LED's	8000-88011-3590500
Exact8, 8xM8, 3-pole, moulded cable 10.0m PUR 8x0,34+2x0,75 NPN-LED's	8000-88011-3591000

**Comments**



Further cable lengths on request.  
Plastic housings with good resistance against chemicals and oils.  
The resistance to aggressive media should be individually tested for your application. Further details on request.

All data on this data sheet was compiled carefully.

Liability regarding correctness, completeness, and actuality is limited to gross negligence. Created: 06/12


Contact layout

M8-Females 3-pole

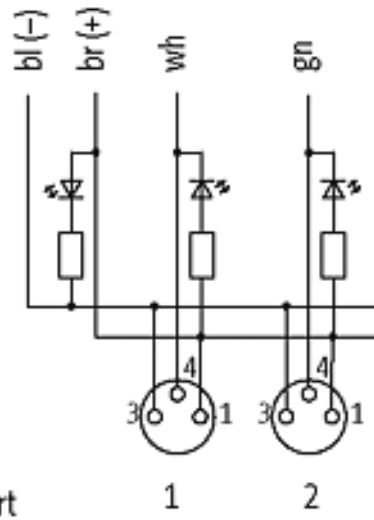


for 1 signal per port

Circuit diagram

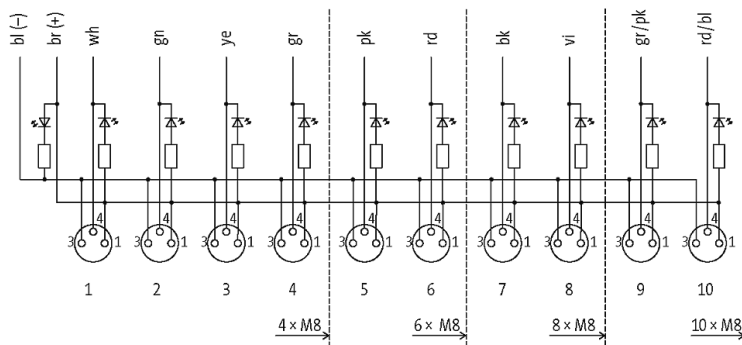

Dimension drawing

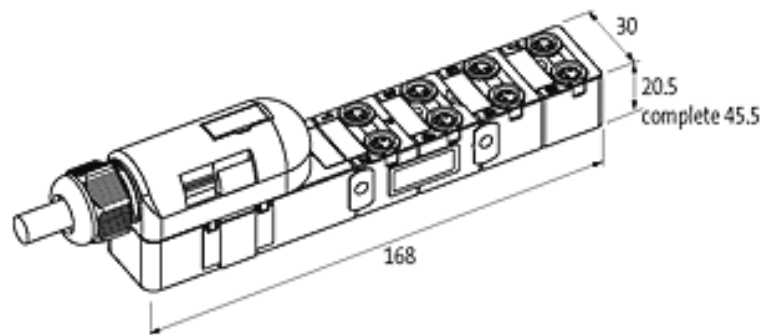

All data on this data sheet was compiled carefully.  
Liability regarding correctness, completeness, and actuality is limited to gross negligence. Created: 06/12

Representante oficial de:



[Argentina – Uruguay – Paraguay – Bolivia – Colombia – y Perú.]



Calle 49 N° 5764 - Villa Ballester (B1653AOX) - Prov. de Buenos Aires - ARGENTINA  
Tel: (+54 11) 4768-4242 / Fax: (+54 11) 4849-1212  
Mail: [ventas@nakase.com.ar](mailto:ventas@nakase.com.ar) / Web: [www.nakase.com.ar](http://www.nakase.com.ar)

