

M12 adaptor on top of MSUD valve form A 18mm Replaced Art.-No. 13858

Form A (18 mm) ? M12, connector top entry
for pressure switches
LED (yellow/green)
5-pole

Image

Vicarious picture

Approvals**Form**

41321

Technical Data

Operating voltage	24 V AC/DC ±25 %
Operating current per contact (40 °C)	max. 4 A
Protection	IP65 and IP67 when plugged and screwed down (EN 60529)
Temperature range	-25...+85 °C


Commercial data

Net weight	32
Net weight	32
Weight unit	gram
Basic unit	pc.
Customs tariff number	85369010
Unit (piece)	1
Limited value	1


Comments

Plastic housings with good resistance against chemicals and oils.
The resistance to aggressive media should be individually tested for your application. Further details on request.

Contact layout

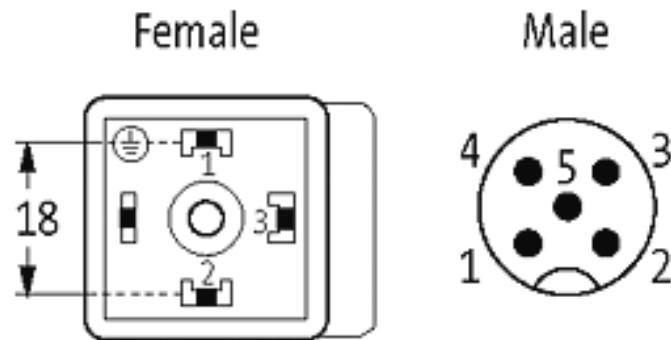

Circuit diagram

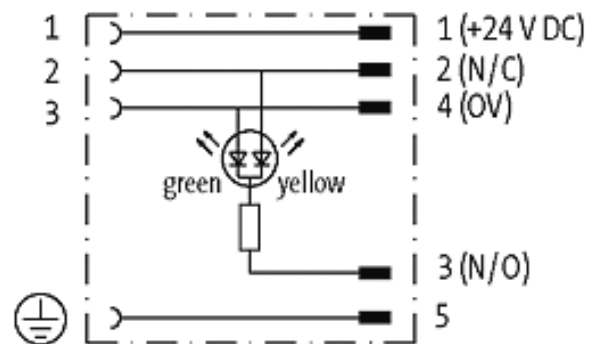

Representante oficial de:



[Argentina – Uruguay – Paraguay – Bolivia – Colombia – y Perú.]



Calle 49 N° 5764 - Villa Ballester (B1653AOX) - Prov. de Buenos Aires - ARGENTINA
Tel: (+54 11) 4768-4242 / Fax: (+54 11) 4849-1212
Mail: ventas@nakase.com.ar / Web: www.nakase.com.ar

