

M12 adaptor on rear of MSUD valve form A 18mm Replaced Art.-No. 13856

Form A (18 mm) ? M12, connector at the rear
LED (yellow)
3-pole

Image

Vicarious picture

Approvals**Form**

41401

Technical Data

Operating voltage	24 V AC/DC
Operating current per contact (40 °C)	max. 4 A
Configuration	3 contacts + PE opposite plug contact
Switch off spike	<= 55 V
Current consumption	max. 15 mA
Protection	IP65 and IP67 when plugged and screwed down (EN 60529)
Temperature range	-25...+85 °C
Dimensions H x W x D	48 x 27 x 25 mm

Commercial data


Net weight	28
Net weight	28
Weight unit	gram
Basic unit	pc.
Customs tariff number	85369010
Unit (piece)	1
Limited value	1

Comments


Plastic housings with good resistance against chemicals and oils.
The resistance to aggressive media should be individually tested for your application. Further details on request.

All data on this data sheet was compiled carefully.
Liability regarding correctness, completeness, and actuality is limited to gross negligence. Created: 06/12

Contact layout

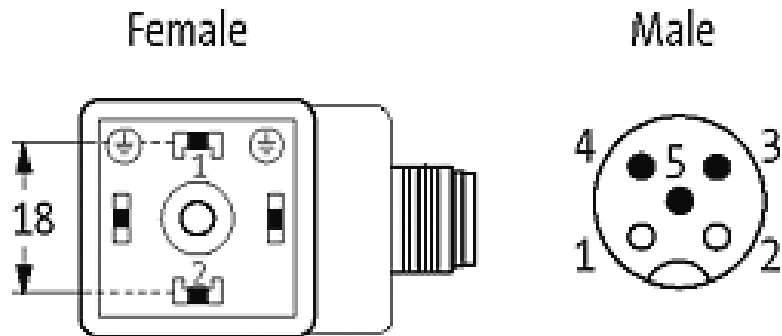

Circuit diagram

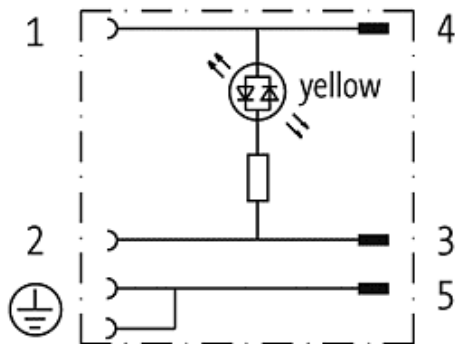

Representante oficial de:



[Argentina – Uruguay – Paraguay – Bolivia – Colombia – y Perú.]



Calle 49 N° 5764 - Villa Ballester (B1653AOX) - Prov. de Buenos Aires - ARGENTINA
Tel: (+54 11) 4768-4242 / Fax: (+54 11) 4849-1212
Mail: ventas@nakase.com.ar / Web: www.nakase.com.ar

