


Relay 110V AC IN: 110 VAC - OUT: 250 VAC/DC / 16 A

1 C/O contact
110 V AC


Image




Vicarious picture

Technical Data	
Switching voltage	max. 250 V AC/DC
Switching current	max. 16 A
Breaking capacity (voltage dependent)	max. 4000 VA/300 W
Min. load current	12 V DC/100 mA
Contact material	Ag Sn O ₂
Hold-on	1.6 VA/0.65 W
Switching time	15/20 ms
Dimensions H × W × D	25 x 29 x 12.4 mm
Commercial data	
Net weight	19
Net weight	19
Weight unit	gram
Basic unit	pc.
Customs tariff number	85364900
Unit (piece)	1
Limited value	1

Circuit diagram

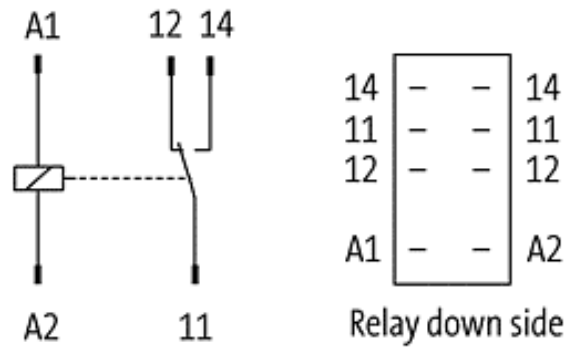

Dimension drawing

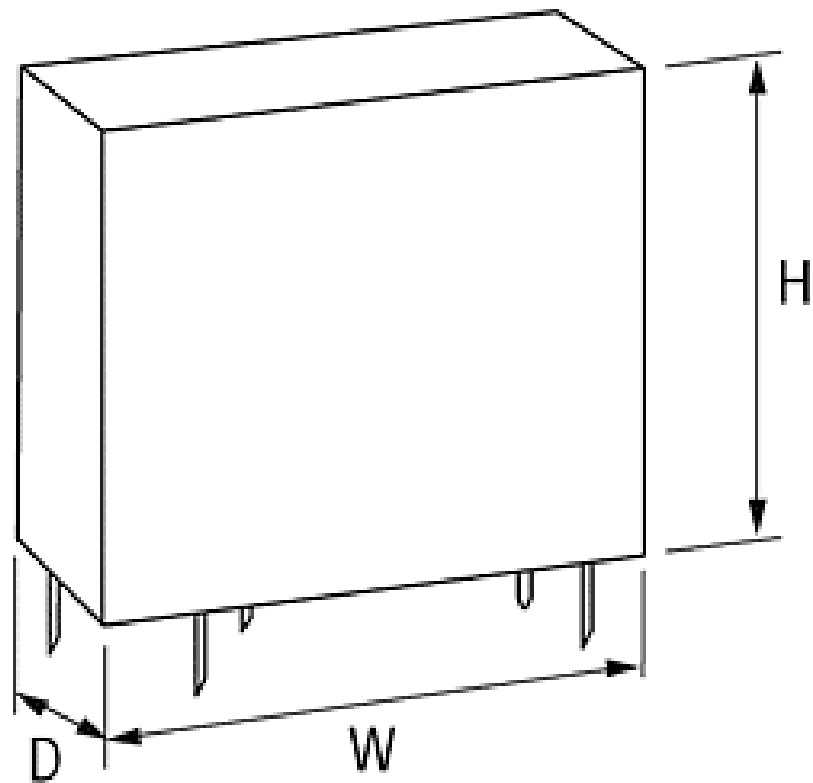

Representante oficial de:



[Argentina – Uruguay – Paraguay – Bolivia – Colombia – y Perú.]



Calle 49 N° 5764 - Villa Ballester (B1653AOX) - Prov. de Buenos Aires - ARGENTINA
Tel: (+54 11) 4768-4242 / Fax: (+54 11) 4849-1212
Mail: ventas@nakase.com.ar / Web: www.nakase.com.ar

