


Relais 230V AC-1U IN: 230 VAC - OUT: 250 VAC/ 16 A

1 C/O contact  
230 V AC

## Image

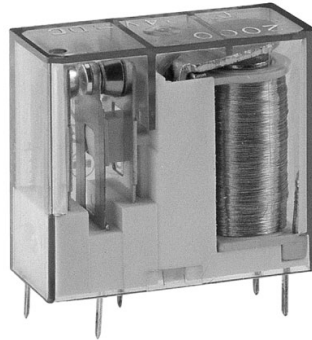

Vicarious picture

**Technical Data**

|                                       |                      |
|---------------------------------------|----------------------|
| Switching voltage                     | max. 250 V AC/DC     |
| Switching current                     | max. 16 A            |
| Breaking capacity (voltage dependent) | max. 4000 VA/300 W   |
| Min. load current                     | 12 V DC/100 mA       |
| Contact material                      | Ag Sn O <sub>2</sub> |
| Hold-on                               | 1.6 VA/0.65 W        |
| Switching time                        | 15/20 ms             |
| Dimensions H × W × D                  | 25 x 29 x 12.4 mm    |


**Commercial data**

|                       |          |
|-----------------------|----------|
| Net weight            | 19       |
| Net weight            | 19       |
| Weight unit           | gram     |
| Basic unit            | pc.      |
| Customs tariff number | 85364900 |
| Unit (piece)          | 1        |
| Limited value         | 1        |


All data on this data sheet was compiled carefully.

Liability regarding correctness, completeness, and actuality is limited to gross negligence. Created: 06/12

## Circuit diagram

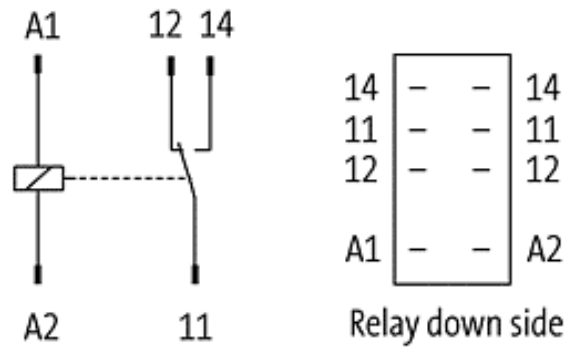

## Dimension drawing

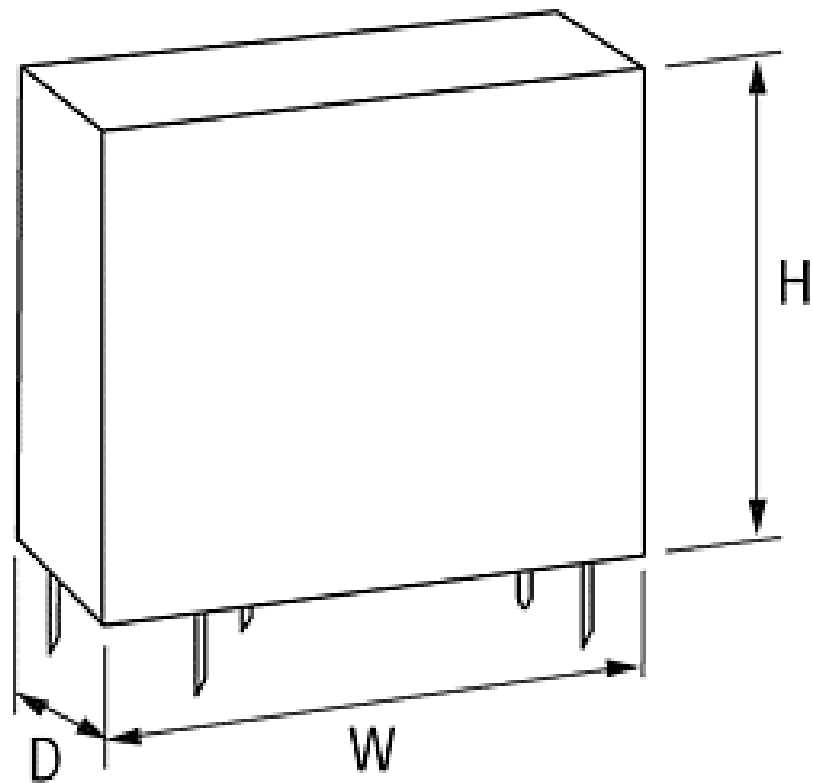

Representante oficial de:



[Argentina – Uruguay – Paraguay – Bolivia – Colombia – y Perú.]



Calle 49 N° 5764 - Villa Ballester (B1653AOX) - Prov. de Buenos Aires - ARGENTINA  
Tel: (+54 11) 4768-4242 / Fax: (+54 11) 4849-1212  
Mail: [ventas@nakase.com.ar](mailto:ventas@nakase.com.ar) / Web: [www.nakase.com.ar](http://www.nakase.com.ar)

