

MIRO 6,2 pluggable plug in module output relay IN: 6 VAC/DC - OUT: 250 VAC/DC / 6 A

6 V AC/DC

Image



Vicarious picture

Switching capacity according to (EN 60947)

24 V	AC12;6 A	AC15; 3 A	DC13;1 A
110 V	AC12;6 A	AC15; 3 A	DC13; 0.2 A
230 V	AC12;6 A	AC15; 3 A	DC13; 0.1 A

Technical Data

Switching voltage	max. 250 V AC/DC
Switching current	max. 6 A
Breaking capacity (voltage dependent)	max. 1500 VA/120 W
Min. load current	12 V DC/10 mA
Contact material	Ag Sn O ₂
Hold-on	1.6 VA/0.65 W
Switching time	8/4 ms
Dimensions H × W × D	15 x 28 x 5 mm


Commercial data

Net weight	6
Net weight	6
Weight unit	gram
Basic unit	pc.
Customs tariff number	85364900
Unit (piece)	1
Limited value	1


All data on this data sheet was compiled carefully.

Liability regarding correctness, completeness, and actuality is limited to gross negligence. Created: 06/12

Circuit diagram

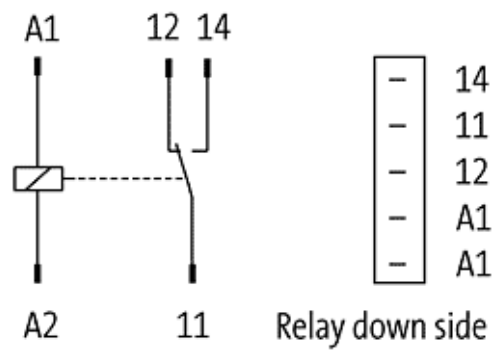

Dimension drawing

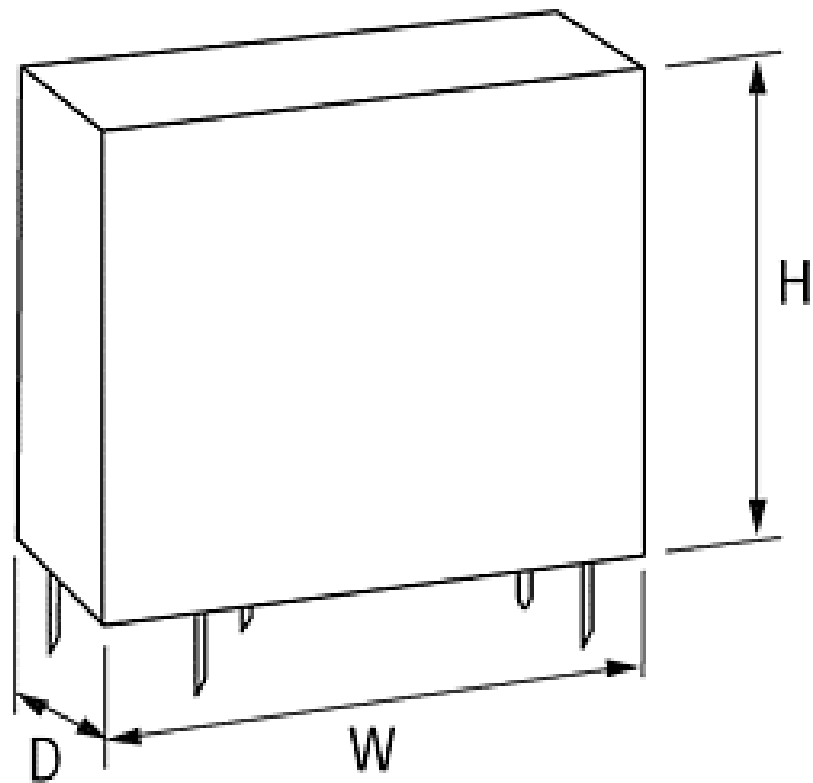

Representante oficial de:



[Argentina – Uruguay – Paraguay – Bolivia – Colombia – y Perú.]



Calle 49 N° 5764 - Villa Ballester (B1653AOX) - Prov. de Buenos Aires - ARGENTINA
Tel: (+54 11) 4768-4242 / Fax: (+54 11) 4849-1212
Mail: ventas@nakase.com.ar / Web: www.nakase.com.ar

