


7/8" female 90° with cable PUR-JBZ 5x1,0 1,5m

Female 90°  
Power cable  
5-pole

## Image

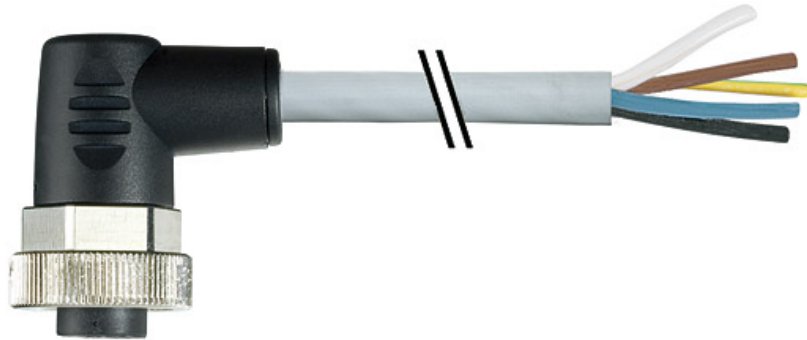

Vicarious picture

## Approvals



## Form

78051

## Technical Data

Operating voltage	max. 230/400 V AC/DC
Operating current per contact (40 °C)	max. 8 A
Locking of ports	Screw thread
Protection	IP65 and IP67 when plugged and screwed down (EN 60529)
Temperature range	-25...+85 °C, depending on cable quality

## Cable

No./diameter of wires	5 × 1.0 mm <sup>2</sup>
Wire isolation	PP (br, wh, bl, bk, gnye, num.)
C-track properties	Max. Externe Vorsicherung 20 A (T) in der Gebäudeinstallation
Jacket	PUR/PVC
Outer diameter	approx. 7.2 mm
Bend radius (mobile)	10 x outer diameter
Temperature range (fixed)	-30...+70 °C
Temperature range (mobile)	-5...+70 °C

## Commercial data

Net weight	227
Net weight	227
Weight unit	gram
Basic unit	pc.
Customs tariff number	85444290
Unit (piece)	1
Limited value	1

All data on this data sheet was compiled carefully.

Liability regarding correctness, completeness, and actuality is limited to gross negligence. Created: 06/12

**Comments**


Further cable lengths on request.

Plastic housings with good resistance against chemicals and oils.

The resistance to aggressive media should be individually tested for your application. Further details on request.

Contact layout

# Female

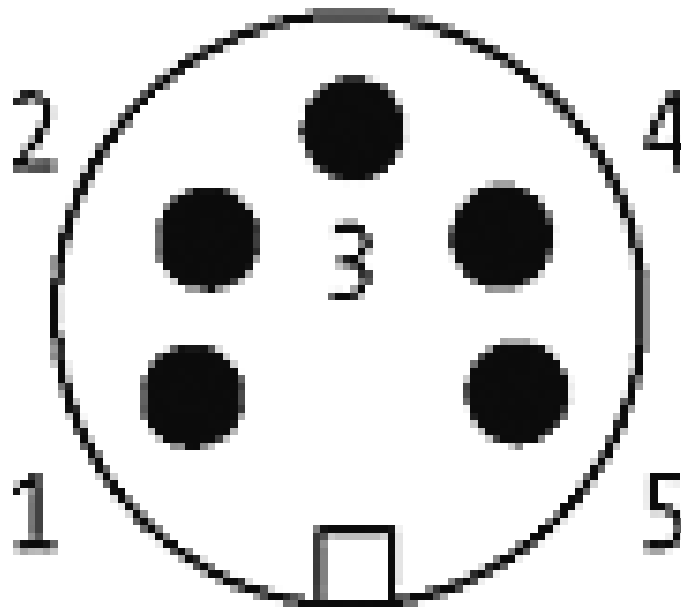

Dimension drawing

