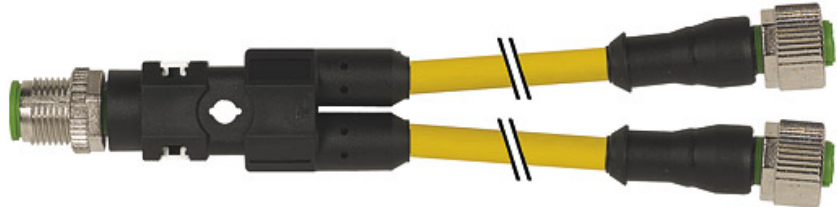


M12 Y-distributor / M12 female straight PVC-OB 3x0,34 yellow 0,3m

Male straight to female straight

Y-connector M12 - M12, 4-pole (bridged)

Art.-No. 7005 - M12 Lite - (plastic hexagonal screw) on request

Image

Vicarious picture

Approvals**Form**

40721

Technical Data

| | |
|---------------------------------------|---|
| Protection | IP65 and IP67 when plugged and screwed down (EN 60529) |
| Operating voltage | max. 250 V AC/DC |
| Operating current per contact (40 °C) | max. 4 A |
| Locking of ports | screw thread M12 × 1 mm (recommended torque = 0.6 Nm) self-securing |
| Temperature range | -25...+85 °C, depending on cable quality |

All data on this data sheet was compiled carefully.

Liability regarding correctness, completeness, and actuality is limited to gross negligence. Created: 06/12

Cable

| | |
|----------------------------|---|
| No./diameter of wires | 3 × 0.34 mm ² |
| Wire isolation | PVC (br, bl, bk) |
| C-track properties | Max. Externe Vorsicherung 20 A (T) in der Gebäudeinstallation |
| Jacket | PVC |
| Outer diameter | approx. 4.6 mm |
| Bend radius (mobile) | 10 x outer diameter |
| Temperature range (fixed) | -30...+80 °C |
| Temperature range (mobile) | -5...+80 °C |

Commercial data

| | |
|-----------------------|----------|
| Net weight | 62 |
| Net weight | 62 |
| Weight unit | gram |
| Basic unit | pc. |
| Customs tariff number | 85444290 |
| Unit (piece) | 1 |
| Limited value | 1 |

Comments

Plastic housings with good resistance against chemicals and oils.
The resistance to aggressive media should be individually tested for your application. Further details on request.
Further cable lengths on request.

Representante oficial de:



[Argentina – Uruguay – Paraguay – Bolivia – Colombia – y Perú.]



Calle 49 N° 5764 - Villa Ballester (B1653AOX) - Prov. de Buenos Aires - ARGENTINA
Tel: (+54 11) 4768-4242 / Fax: (+54 11) 4849-1212
Mail: ventas@nakase.com.ar / Web: www.nakase.com.ar

