

M12 male Y-distr. straight field-wireable Replaced Art.-No. 336805

Male straight, Y connector
5-pole
Clamping range cable entry: 2.1...3/4...5 mm

Image

Vicarious picture

Approvals**Express shipments****Form**

12801

Technical Data

Operating voltage	max. 125 V AC/DC
Operating current per contact (40 °C)	max. 4 A
Connection diameter	max. 0.75 mm ²
Clamping range (cable diameter)	2.1...3/4...5 mm (2 cable entries)
Protection	IP65 and IP67 when plugged and screwed down (EN 60529)
Temperature range	-25...+85 °C

Commercial data


Net weight	24
Net weight	24
Weight unit	gram
Basic unit	pc.
Customs tariff number	85369010
Unit (piece)	1
Limited value	1

Comments

Plastic housings with good resistance against chemicals and oils.
The resistance to aggressive media should be individually tested for your application. Further details on request.

Contact layout

Male

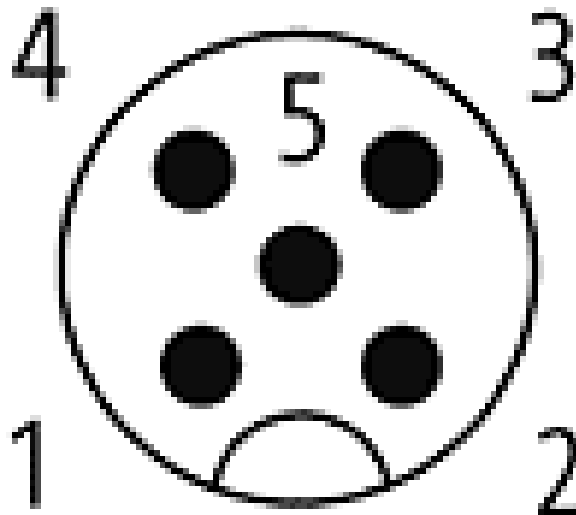

Circuit diagram



Dimension drawing

