

M23 female straight, 19-pole, with open ended cable 5m PUR 12x0,34/3x0,75

Female straight
19-pole
15-pole used
for 6-way distribution boxes, 5-pole

Image

Vicarious picture

Form

23231

Technical Data

Operating voltage	125 V AC/DC
Operating current per contact (40 °C)	max. 7.5 A
Protection	IP65 and IP67 when plugged and screwed down (EN 60529)
Locking of ports	Screw thread M23 × 1 mm
Temperature range	-25...+85 °C, depending on cable quality

Cable

No./diameter of wires	12 × 0.34 + 3 × 0.75 mm ²
Wire isolation	PVC (yebr, rd, grpk, wh, rdbl, gn, whgn, gn, brgn, gr, whye, pk, br, gnye, bl)
C-track properties	yes
Jacket	PUR/PVC
Outer diameter	approx. 9.8 mm
Bend radius (mobile)	12 × outer diameter
Temperature range (fixed)	-30...+80 °C
Temperature range (mobile)	-5...+70 °C

Commercial data

Net weight	860
Net weight	860
Weight unit	gram
Basic unit	pc.
Customs tariff number	85444290
Unit (piece)	1
Limited value	1

Comments


Further cable lengths on request.
Plastic housings with good resistance against chemicals and oils.
The resistance to aggressive media should be individually tested for your application. Further details on request.

All data on this data sheet was compiled carefully.

Liability regarding correctness, completeness, and actuality is limited to gross negligence. Created: 06/12

Contact layout

Female

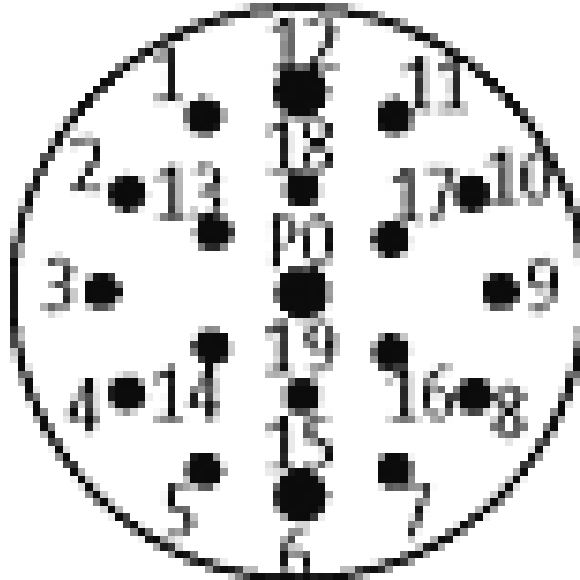

Circuit diagram

15	white
7	gray/pink
5	green
4	red/blue
16	yellow
8	white/green
3	gray
14	brown/green
17	pink
9	white/yellow
2	red
13	yellow/brown
19	brown 0.75 mm ²
6	blue 0.75 mm ²
12	green/yellow 0.75 mm ²

Representante oficial de:



[Argentina – Uruguay – Paraguay – Bolivia – Colombia – y Perú.]



Calle 49 N° 5764 - Villa Ballester (B1653AOX) - Prov. de Buenos Aires - ARGENTINA
Tel: (+54 11) 4768-4242 / Fax: (+54 11) 4849-1212
Mail: ventas@nakase.com.ar / Web: www.nakase.com.ar

