

MOSA MQ12 female straight field-wireable (IDC)

Female straight
3-pole
insulation displacement technology
Connection diameter: 0.5...1.0 mm²

Image

Vicarious picture

Approvals**Form**

12631

Technical Data


Operating voltage	max. 125 V AC/DC
Operating current per contact (40 °C)	max. 4 A
Connection diameter	0.5...1.0 mm ² (conductor diameter \geq 0.1 mm)
Outer wire diameter	1.6...2.0 mm
Protection	IP65 and IP67 when plugged and screwed down (EN 60529)
Clamping range (cable diameter)	5.5...8 mm
Wire isolation	PVC, PP, TPE
Temperature range	-25...+85 °C

All data on this data sheet was compiled carefully.


Liability regarding correctness, completeness, and actuality is limited to gross negligence. Created: 06/12

Contact layout

Female

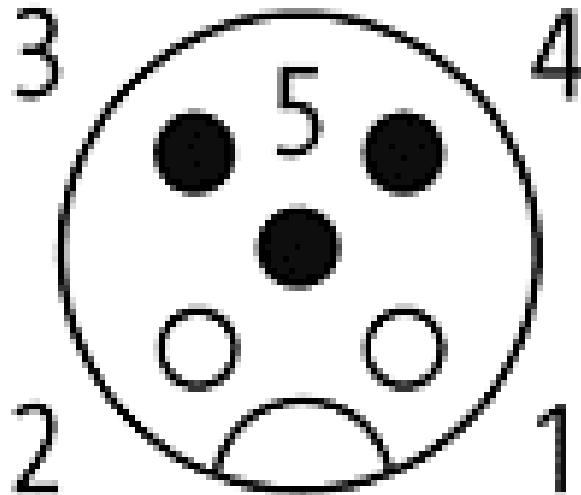

Circuit diagram

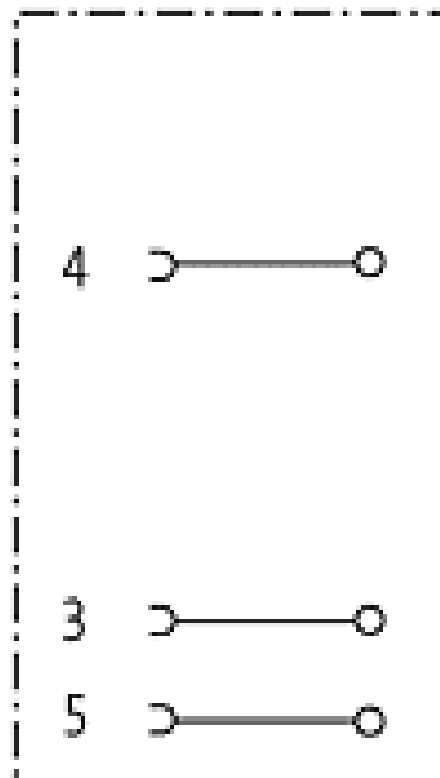

Representante oficial de:



[Argentina – Uruguay – Paraguay – Bolivia – Colombia – y Perú.]



Calle 49 N° 5764 - Villa Ballester (B1653AOX) - Prov. de Buenos Aires - ARGENTINA
Tel: (+54 11) 4768-4242 / Fax: (+54 11) 4849-1212
Mail: ventas@nakase.com.ar / Web: www.nakase.com.ar

