

Push Pull Power with cable, PUR-IBZ 5x2,5 grey 1,5m

Push Pull
Power cable
5-pole

Image

Vicarious picture

Form	99621
Technical Data	
Operating voltage	max. 24 V AC/DC
Operating current per contact (20 °C)	max. 16 A
Locking of ports	Push Pull
Protection	IP65 and IP67 when plugged and screwed down (EN 60529)
Temperature range	-40...+70 °C, depending on cable quality
Cable	
No./diameter of wires	5 × 2.5 mm ²
Wire isolation	PP (br, wh, bl, bk, gnye, num.)
C-track properties	5 Mio.
Jacket	PUR (UL/CSA)
Outer diameter	approx. 9.7 mm
Bend radius (mobile)	10 x outer diameter
Temperature range (fixed)	-50...+80 °C
Temperature range (mobile)	-20...+80 °C
Commercial data	
Net weight	398
Net weight	398
Weight unit	gram
Basic unit	pc.
Customs tariff number	85444290
Unit (piece)	1
Limited value	1

Comments


Further cable lengths on request.
Plastic housings with good resistance against chemicals and oils.
The resistance to aggressive media should be individually tested for your application. Further details on request.

All data on this data sheet was compiled carefully.
Liability regarding correctness, completeness, and actuality is limited to gross negligence. Created: 06/12


Contact layout



Circuit diagram

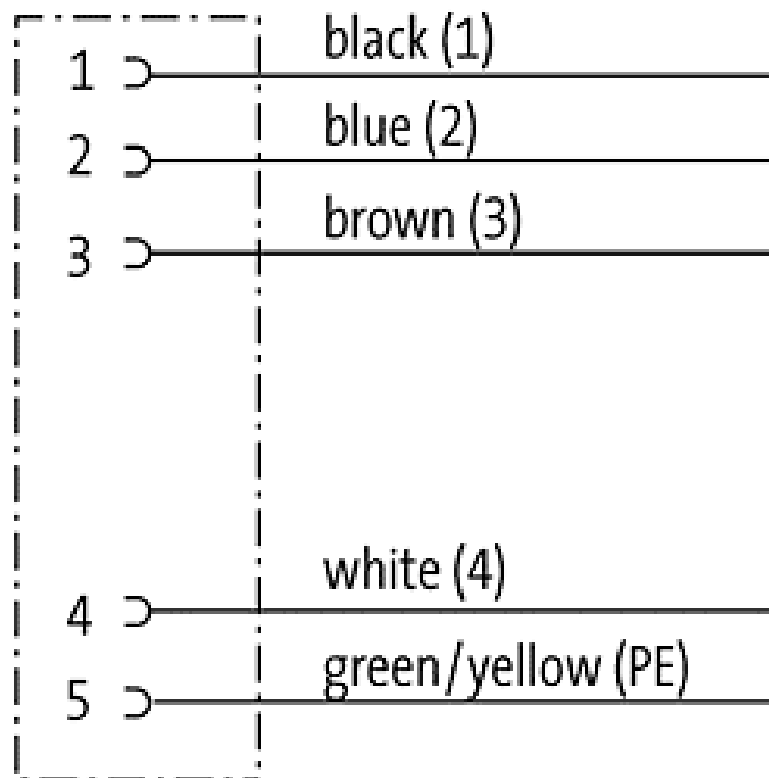

Dimension drawing

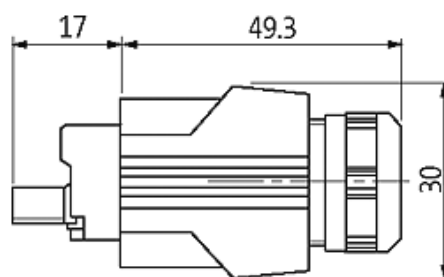

Height: 36 mm

Representante oficial de:



[Argentina – Uruguay – Paraguay – Bolivia – Colombia – y Perú.]



Calle 49 N° 5764 - Villa Ballester (B1653AOX) - Prov. de Buenos Aires - ARGENTINA
Tel: (+54 11) 4768-4242 / Fax: (+54 11) 4849-1212
Mail: ventas@nakase.com.ar / Web: www.nakase.com.ar

