

M12 male straight, shield.b.cod.with cable, Interbus PUR-OB 3x2x0,25 shielded violet 1,5m

Interbus, B-coded
 Female straight
 5-pole, shielded

Image

Vicarious picture

Approvals**Form**

14261

Technical Data

Operating voltage	60 V AC/DC
Operating current per contact (40 °C)	max. 4 A
Locking of ports	screw thread M12 × 1 mm (recommended torque = 0.6 Nm) self-securing
Temperature range	-25...+85 °C, depending on cable quality

Cable

No./diameter of wires	3 × 2 × AWG24
Wire isolation	PE (br, wh, gr, pk, gn, ye)
C-track properties	yes
Jacket	PUR
Outer diameter	approx. 7.8 mm
Bend radius (mobile)	10 x outer diameter
Temperature range (fixed)	-40...+80 °C
Temperature range (mobile)	-30...+70 °C

Commercial data

Net weight	125
Net weight	125
Weight unit	gram
Basic unit	pc.
Customs tariff number	85444290
Unit (piece)	1
Limited value	10


All data on this data sheet was compiled carefully.

Liability regarding correctness, completeness, and actuality is limited to gross negligence. Created: 06/12


Accessories		Art.-No.
	M12-Schaltschrankdurchführung 5pol B-cod	7000-44111-0000000
Comments	Further cable lengths on request. Plastic housings with good resistance against chemicals and oils. The resistance to aggressive media should be individually tested for your application. Further details on request.	

Contact layout

Female

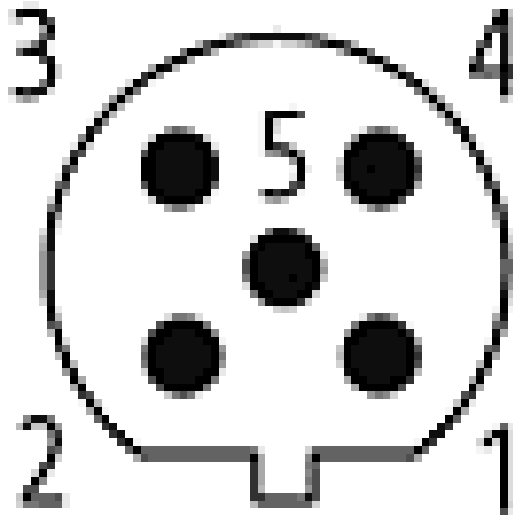

Circuit diagram

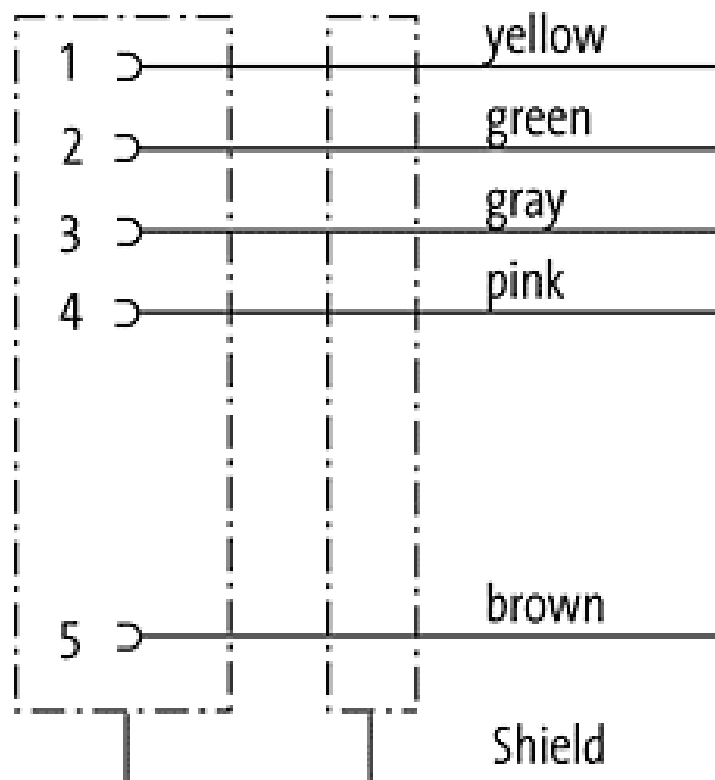

Representante oficial de:



[Argentina – Uruguay – Paraguay – Bolivia – Colombia – y Perú.]



Calle 49 N° 5764 - Villa Ballester (B1653AOX) - Prov. de Buenos Aires - ARGENTINA
Tel: (+54 11) 4768-4242 / Fax: (+54 11) 4849-1212
Mail: ventas@nakase.com.ar / Web: www.nakase.com.ar

