

M12male 0° / M12 female 0° shielded,b-cod,Interbus PUR-OB 3x2x0,25 shielded violet 0,3m

Interbus, B-coded
Male straight to female straight
M12 - M12
5-pole, shielded

Image



Vicarious picture

Approvals



Bus technologies



Form

44051

Technical Data

Operating voltage	60 V AC/DC
Operating current per contact (40 °C)	max. 4 A
Protection	IP65 and IP67 when plugged and screwed down (EN 60529)
Locking of ports	screw thread M12 x 1 mm (recommended torque = 0.6 Nm) self-securing
Temperature range	-25...+85 °C, depending on cable quality

Cable

No./diameter of wires	3 x 2 x AWG24
Wire isolation	PE (br, wh, gr, pk, gn, ye)
C-track properties	yes
Jacket	PUR
Outer diameter	approx. 7.8 mm
Bend radius (mobile)	10 x outer diameter
Temperature range (fixed)	-40...+80 °C
Temperature range (mobile)	-30...+70 °C

All data on this data sheet was compiled carefully.


Liability regarding correctness, completeness, and actuality is limited to gross negligence. Created: 06/12

Commercial data	
Net weight	51
Net weight	51
Weight unit	gram
Basic unit	pc.
Customs tariff number	85444290
Unit (piece)	1
Limited value	10


Accessories	Art.-No.
M12-Schaltschrankdurchführung 5pol B-cod	7000-44111-0000000

Comments
<p>Further cable lengths on request.</p> <p>Plastic housings with good resistance against chemicals and oils.</p> <p>The resistance to aggressive media should be individually tested for your application. Further details on request.</p>

Contact layout

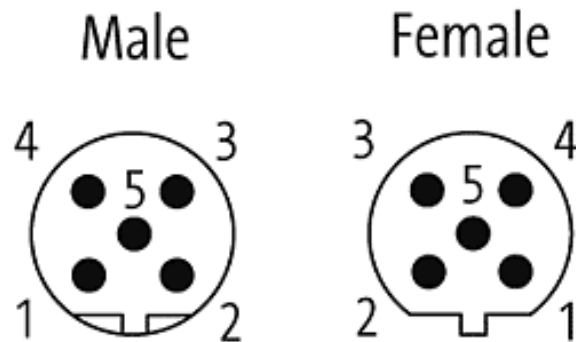

Circuit diagram

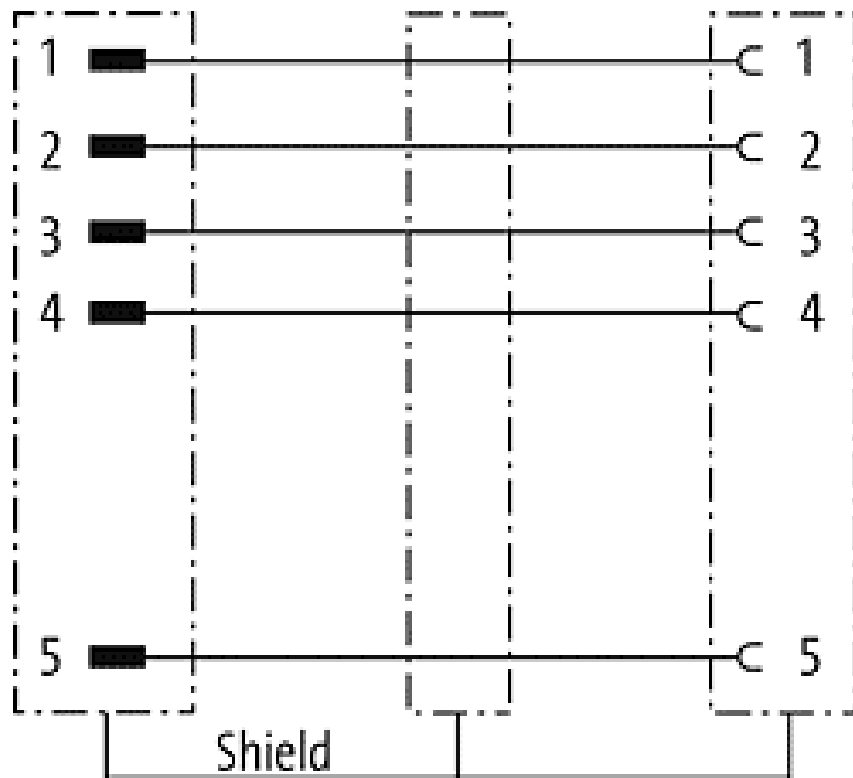

Representante oficial de:



[Argentina – Uruguay – Paraguay – Bolivia – Colombia – y Perú.]



Calle 49 N° 5764 - Villa Ballester (B1653AOX) - Prov. de Buenos Aires - ARGENTINA
Tel: (+54 11) 4768-4242 / Fax: (+54 11) 4849-1212
Mail: ventas@nakase.com.ar / Web: www.nakase.com.ar

