

Connection cap with homerun cable

for 4-way distribution boxes, 5-pole

Image

Vicarious picture

Approvals**Form**

84559

Technical Data

Housing	Plastic, flame retardant
Temperature range	-20...+80 °C, depending on cable quality

You can chose from the following variants:

	Art.-No.
Cap with cable for d-box M12 4-way 5-pole no pot.-sep. 3m PUR/PVC-JB, 8x0,34+3x0,75	8000-84559-3630300
Cap with cable for d-box M12 4-way 5-pole no pot.-sep. 5m PUR/PVC-JB, 8x0,34+3x0,75	8000-84559-3630500
Cap with cable for d-box M12 4-way 5-pole no pot.-sep. 15m PUR/PVC-JB, 8x0,34+3x0,75	8000-84559-3631500
Cap with cable for d-box M12 4-way 5-pole no pot.-sep. 10m PUR/PVC-JB, 8x0,34+3x0,75	8000-84559-3631000
Cap with cable for d-box M12 4-way 5-pole no pot.-sep. 20m PUR/PVC-JB, 8x0,34+3x0,75	8000-84559-3632000
Cap with cable for d-box M12 4-way 5-pole no pot.-sep. 25m PUR/PVC-JB, 8x0,34+3x0,75	8000-84559-3632500
Cap with cable for d-box M12 4-way 5-pole no pot.-sep. 30m PUR/PVC-JB, 8x0,34+3x0,75	8000-84559-3633000
Cap with cable for d-box M12 4-way 5-pole no pot.-sep. 3m PUR-JB, 8x0,5+3x1,0	8000-84559-4480300
Cap with cable for d-box M12 4-way 5-pole no pot.-sep. 5m PUR-JB, 8x0,5+3x1,0	8000-84559-4480500
Cap with cable for d-box M12 4-way 5-pole no pot.-sep. 10m PUR-JB, 8x0,5+3x1,0	8000-84559-4481000
Cap with cable for d-box M12 4-way 5-pole no pot.-sep. 15m PUR-JB, 8x0,5+3x1,0	8000-84559-4481500
Cap with cable for d-box M12 4-way 5-pole no pot.-sep. 20m PUR-JB, 8x0,5+3x1,0	8000-84559-4482000
Cap with cable for d-box M12 4-way 5-pole no pot.-sep. 25m PUR-JB, 8x0,5+3x1,0	8000-84559-4482500
Cap with cable for d-box M12 4-way 5-pole no pot.-sep. 30m PUR-JB, 8x0,5+3x1,0	8000-84559-4483000

Comments



Further cable lengths on request.
 Plastic housings with good resistance against chemicals and oils.
 The resistance to aggressive media should be individually tested for your application. Further details on request.

All data on this data sheet was compiled carefully.

Liability regarding correctness, completeness, and actuality is limited to gross negligence. Created: 06/12


Contact layout

M12-Females 5-pole

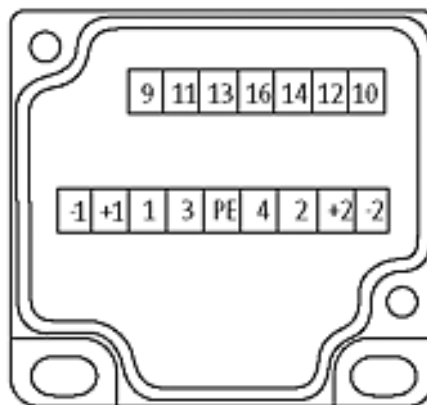

for 2 signals per port

Dimension drawing

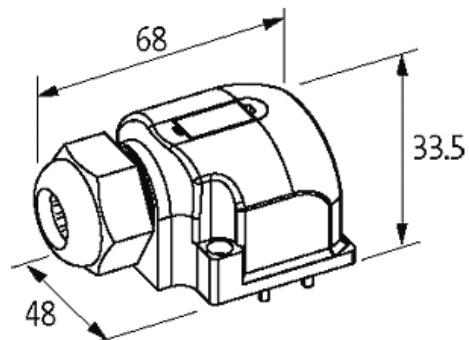

Representante oficial de:



[Argentina – Uruguay – Paraguay – Bolivia – Colombia – y Perú.]



Calle 49 N° 5764 - Villa Ballester (B1653AOX) - Prov. de Buenos Aires - ARGENTINA
Tel: (+54 11) 4768-4242 / Fax: (+54 11) 4849-1212
Mail: ventas@nakase.com.ar / Web: www.nakase.com.ar

