

**Connection cap with homerun cable**

for 8-way distribution boxes, 5-pole

**Image**

Vicarious picture

**Approvals****Form**

88559

**Technical Data**

|                   |  |
|-------------------|--|
| Housing           | Plastic, flame retardant                 |
| Temperature range | -20...+80 °C, depending on cable quality |

**You can chose from the following variants:**

|   | <b>Art.-No.</b>    |
|---|--------------------|
| Cap with cable for d-box M12 8-way 5-pole no pot.-sep. 3m PUR/PVC-JB, 16x0,34+3x0,75  | 8000-88559-3980300 |
| Cap with cable for d-box M12 8-way 5-pole no pot.-sep. 5m PUR/PVC-JB, 16x0,34+3x0,75  | 8000-88559-3980500 |
| Cap with cable for d-box M12 8-way 5-pole no pot.-sep. 10m PUR/PVC-JB, 16x0,34+3x0,75 | 8000-88559-3981000 |
| Cap with cable for d-box M12 8-way 5-pole no pot.-sep. 15m PUR/PVC-JB, 16x0,34+3x0,75 | 8000-88559-3981500 |
| Cap with cable for d-box M12 8-way 5-pole no pot.-sep. 20m PUR/PVC-JB, 16x0,34+3x0,75 | 8000-88559-3982000 |
| Cap with cable for d-box M12 8-way 5-pole no pot.-sep. 25m PUR/PVC-JB, 16x0,34+3x0,75 | 8000-88559-3982500 |
| Cap with cable for d-box M12 8-way 5-pole no pot.-sep. 30m PUR/PVC-JB, 16x0,34+3x0,75 | 8000-88559-3983000 |
| Cap with cable for d-box M12 8-way 5-pole no pot.-sep. 3m PUR-JB, 16x0,5+3x1,0        | 8000-88559-4520300 |
| Cap with cable for d-box M12 8-way 5-pole no pot.-sep. 5m PUR-JB, 16x0,5+3x1,0        | 8000-88559-4520500 |
| Cap with cable for d-box M12 8-way 5-pole no pot.-sep. 10m PUR-JB, 16x0,5+3x1,0       | 8000-88559-4521000 |
| Cap with cable for d-box M12 8-way 5-pole no pot.-sep. 15m PUR-JB, 16x0,5+3x1,0       | 8000-88559-4521500 |
| Cap with cable for d-box M128-way 5-pole no pot.-sep.20m PUR-JB, 16x0,5+3x1,0         | 8000-88559-4522000 |
| Cap with cable for d-box M128-way 5-pole no pot.-sep.25m PUR-JB, 16x0,5+3x1,0         | 8000-88559-4522500 |
| Cap with cable for d-box M128-way 5-pole no pot.-sep.30m PUR-JB, 16x0,5+3x1,0         | 8000-88559-4523000 |

**Comments**



Further cable lengths on request.  
 Plastic housings with good resistance against chemicals and oils.  
 The resistance to aggressive media should be individually tested for your application. Further details on request.

All data on this data sheet was compiled carefully.

Liability regarding correctness, completeness, and actuality is limited to gross negligence. Created: 06/12


## Contact layout

## M12-Females 5-pole

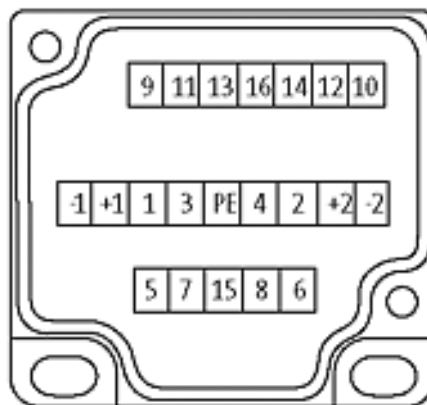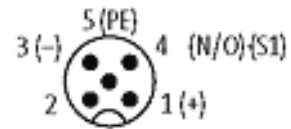

for 2 signals per port

## Dimension drawing

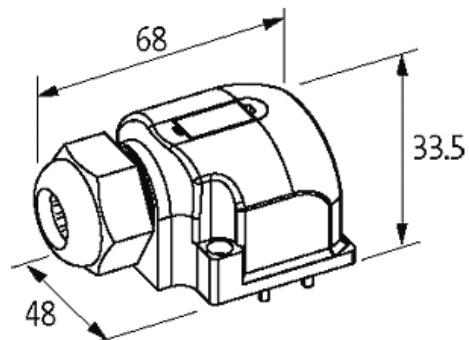

Representante oficial de:



[Argentina – Uruguay – Paraguay – Bolivia – Colombia – y Perú.]



Calle 49 N° 5764 - Villa Ballester (B1653AOX) - Prov. de Buenos Aires - ARGENTINA  
Tel: (+54 11) 4768-4242 / Fax: (+54 11) 4849-1212  
Mail: [ventas@nakase.com.ar](mailto:ventas@nakase.com.ar) / Web: [www.nakase.com.ar](http://www.nakase.com.ar)

