

**Exact12, NPN, 8-way, 5-pole, with pre-wired homerun cable**

5-pole  
for NPN signals 24 V DC

### Image



Vicarious picture

### Approvals



### Contact layout

Contact 1	(+)
Contact 2	(N/C)/(S2)
Contact 3	(-)
Contact 4	(N/O)/(S1)
Contact 5	(Earth)
LED display	LED (green): Power    LED (yellow): signal (S1)    LED (white): Signal (S2)

### Form

88511

### Technical Data

Protection	IP65 and IP67 when plugged and screwed down (EN 60529)
Operating voltage	24 V DC
Operating current per contact (40 °C)	max. 4 A
Total current	max. 10 A
Housing	Plastic, flame retardant
Temperature range	-20...+60 °C

### Technical data M12 port

Locking of ports	Screw thread M12 × 1 mm
------------------	-------------------------

### You can chose from the following variants:

	Art.-No.
Exact12, 8xM12, 5-pole, moulded cable 5.0m PUR/PVC 16x0,34+3x0,75	8000-88511-3980500
Exact12, 8xM12, 5-pole, moulded cable 10.0m PUR/PVC 16x0,34+3x0,75	8000-88511-3981000
Exact12, 8xM12, 5-pole, moulded cable 5.0m PUR 16x0,5+3x1,0	8000-88511-4520500
Exact12, 8xM12, 5-pole, moulded cable 10.0m PUR 16x0,5+3x1,0	8000-88511-4521000

All data on this data sheet was compiled carefully.

Liability regarding correctness, completeness, and actuality is limited to gross negligence. Created: 06/12


**Comments**

Further cable lengths on request.


Plastic housings with good resistance against chemicals and oils.

The resistance to aggressive media should be individually tested for your application. Further details on request.


**Contact layout**

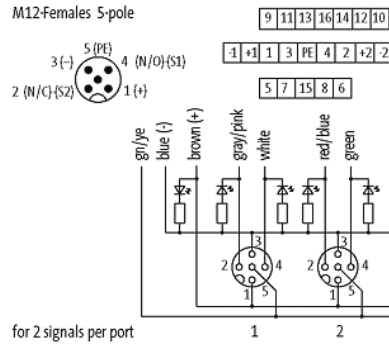

**Circuit diagram**

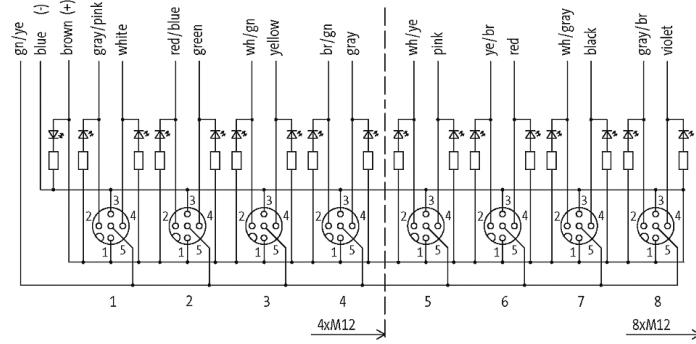

**Dimension drawing**

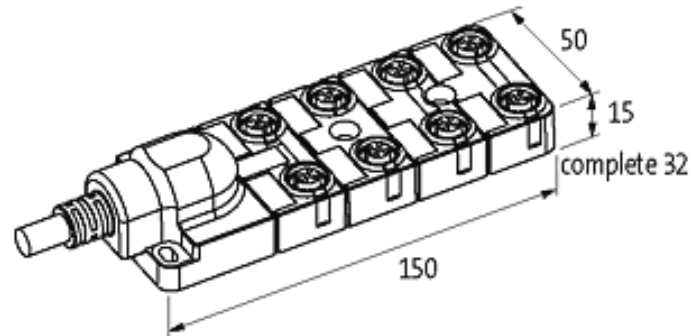

Representante oficial de:



[Argentina – Uruguay – Paraguay – Bolivia – Colombia – y Perú.]



Calle 49 N° 5764 - Villa Ballester (B1653AOX) - Prov. de Buenos Aires - ARGENTINA  
Tel: (+54 11) 4768-4242 / Fax: (+54 11) 4849-1212  
Mail: [ventas@nakase.com.ar](mailto:ventas@nakase.com.ar) / Web: [www.nakase.com.ar](http://www.nakase.com.ar)

