

**M12 adaptor on rear of MSUD valve form A 18mm Replaced Art.-No. 13859**

Form A (18 mm) ? M12, connector at the rear  
for pressure switches  
LED (yellow/green)  
5-pole

**Image**

Vicarious picture

**Approvals****Form**

41441

**Technical Data**

Operating voltage	24 V AC/DC ±25 %
Operating current per contact (40 °C)	max. 4 A
Protection	IP65 and IP67 when plugged and screwed down (EN 60529)
Temperature range	-25...+85 °C


**Commercial data**

Net weight	30
Net weight	30
Weight unit	gram
Basic unit	pc.
Customs tariff number	85366990
Unit (piece)	1
Limited value	1


**Comments**

Plastic housings with good resistance against chemicals and oils.  
The resistance to aggressive media should be individually tested for your application. Further details on request.

## Contact layout

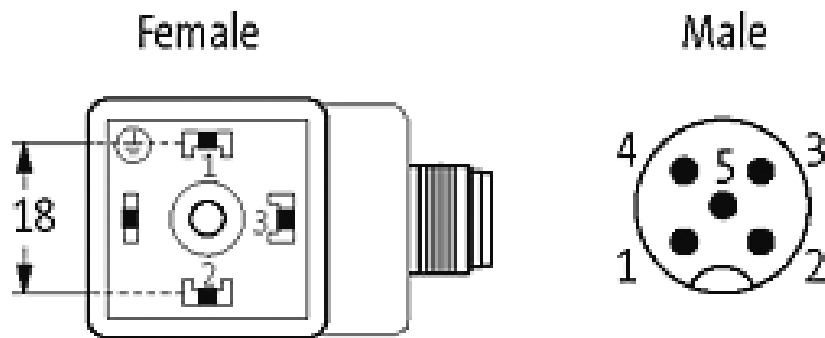

## Circuit diagram

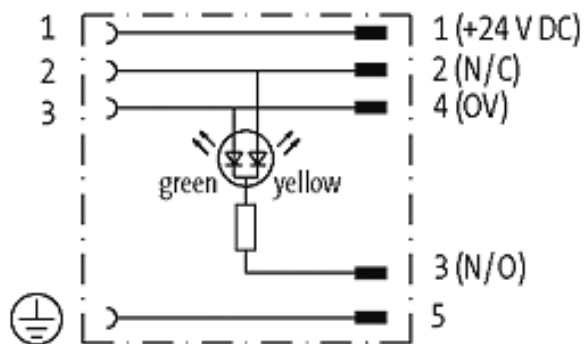

Representante oficial de:



[Argentina – Uruguay – Paraguay – Bolivia – Colombia – y Perú.]



Calle 49 N° 5764 - Villa Ballester (B1653AOX) - Prov. de Buenos Aires - ARGENTINA  
Tel: (+54 11) 4768-4242 / Fax: (+54 11) 4849-1212  
Mail: [ventas@nakase.com.ar](mailto:ventas@nakase.com.ar) / Web: [www.nakase.com.ar](http://www.nakase.com.ar)

