

SVS valve form BI 11mm field-wireable Replaced Art.-No. 3129925

Form BI (11 mm)
230 V AC/DC with LED and VDR
metric

Image



Vicarious picture

Approvals



Form

29921

Technical Data

| | |
|---------------------------------|---|
| Operating voltage | 230 V AC/DC |
| LED display | (yellow) |
| Current consumption | approx. 12 mA |
| Suppression | Varistor |
| Switch off spike | <= 450 V |
| Switch off delay time | <= 15 ms |
| Hold-on | max. 50 W(VA) |
| Compression gland | M16 × 1.5 mm |
| Clamping range (cable diameter) | 5...10 mm |
| Terminals | 4 mm ² single core, with ferrule end 1.5 mm ² |
| Plug color | Black housing, transparent flip top |
| Protection | IP65 when plugged and screwed down (EN 60529), with gland |
| Temperature range | -20...+60 °C |

Commercial data

| | |
|-----------------------|----------|
| Net weight | 50 |
| Net weight | 50 |
| Weight unit | gram |
| Basic unit | pc. |
| Customs tariff number | 85369010 |
| Unit (piece) | 1 |
| Limited value | 1 |

All data on this data sheet was compiled carefully.


Liability regarding correctness, completeness, and actuality is limited to gross negligence. Created: 06/12

Comments


Plastic housings with good resistance against chemicals and oils.

The resistance to aggressive media should be individually tested for your application. Further details on request.

Contact layout

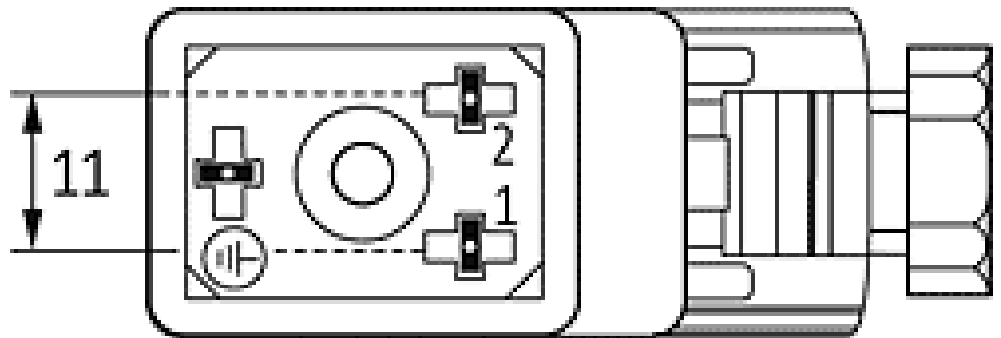

Circuit diagram

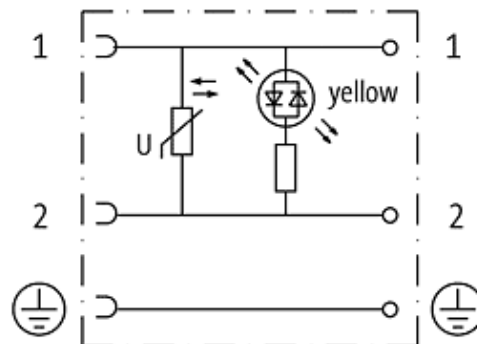

Representante oficial de:



[Argentina – Uruguay – Paraguay – Bolivia – Colombia – y Perú.]



Calle 49 N° 5764 - Villa Ballester (B1653AOX) - Prov. de Buenos Aires - ARGENTINA
Tel: (+54 11) 4768-4242 / Fax: (+54 11) 4849-1212
Mail: ventas@nakase.com.ar / Web: www.nakase.com.ar

