

**SVS valve form BI 11mm field-wireable Replaced Art.-No. 3129725**

Form BI (11 mm)  
230 V AC/DC with LED and VDR  
PG 9

**Image**

Vicarious picture

**Approvals****Form**

29941

**Technical Data**

Operating voltage	230 V AC/DC
LED display	(yellow)
Current consumption	approx. 12 mA
Suppression	Varistor
Switch off spike	<= 450 V
Switch off delay time	<= 15 ms
Hold-on	max. 100 W(VA)
Compression gland	PG 9
Clamping range (cable diameter)	6...8 mm
Terminals	4 mm <sup>2</sup> single core, with ferrule end 1.5 mm <sup>2</sup>
Plug color	Black housing, transparent flip top
Protection	IP65 when plugged and screwed down (EN 60529), with gland
Temperature range	-20...+60 °C

**Commercial data**

Net weight	31
Net weight	31
Weight unit	gram
Basic unit	pc.
Customs tariff number	85369010
Unit (piece)	1
Limited value	1

All data on this data sheet was compiled carefully.


Liability regarding correctness, completeness, and actuality is limited to gross negligence. Created: 06/12

**Comments**


Plastic housings with good resistance against chemicals and oils.

The resistance to aggressive media should be individually tested for your application. Further details on request.

## Contact layout

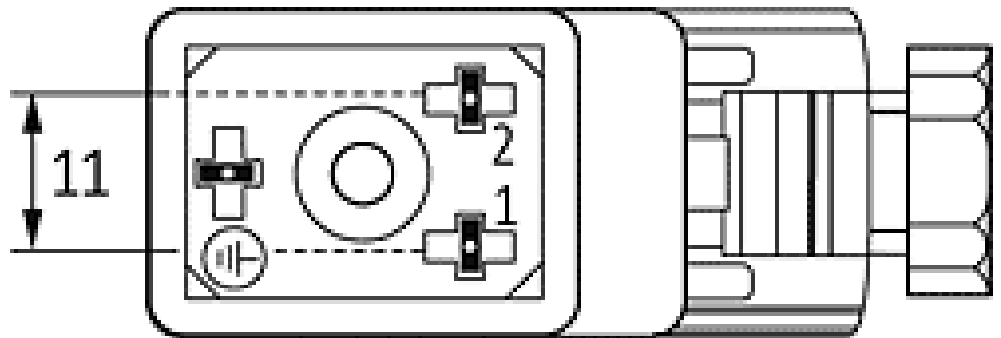

## Circuit diagram

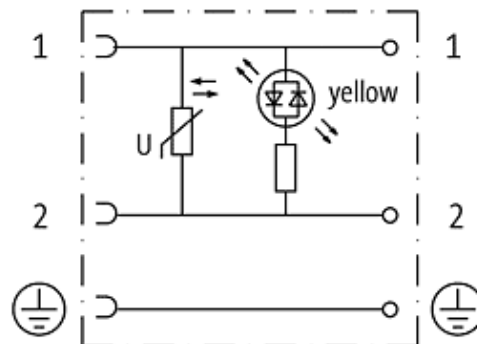

Representante oficial de:



[Argentina – Uruguay – Paraguay – Bolivia – Colombia – y Perú.]



Calle 49 N° 5764 - Villa Ballester (B1653AOX) - Prov. de Buenos Aires - ARGENTINA  
Tel: (+54 11) 4768-4242 / Fax: (+54 11) 4849-1212  
Mail: [ventas@nakase.com.ar](mailto:ventas@nakase.com.ar) / Web: [www.nakase.com.ar](http://www.nakase.com.ar)

