

SVS valve form B 10mm field-wireable Replaced Art.-No. 3129525

Form B (10 mm)
230 V AC/DC with LED and VDR
metric

Image

Vicarious picture

Approvals**Form**

29681

Technical Data

Operating voltage	230 V AC/DC
LED display	(yellow)
Current consumption	approx. 12 mA
Suppression	Varistor
Switch off spike	<= 450 V
Switch off delay time	<= 15 ms
Hold-on	max. 100 W(VA)
Compression gland	M16 × 1.5 mm
Clamping range (cable diameter)	5...10 mm
Terminals	4 mm ² single core, with ferrule end 1.5 mm ²
Plug color	Black housing, transparent flip top
Protection	IP65 when plugged and screwed down (EN 60529), with gland
Temperature range	-20...+60 °C

Commercial data

Net weight	30
Net weight	30
Weight unit	gram
Basic unit	pc.
Customs tariff number	85369010
Unit (piece)	1
Limited value	1


All data on this data sheet was compiled carefully.

Liability regarding correctness, completeness, and actuality is limited to gross negligence. Created: 06/12


Comments

Plastic housings with good resistance against chemicals and oils.
The resistance to aggressive media should be individually tested for your application. Further details on request.

Contact layout

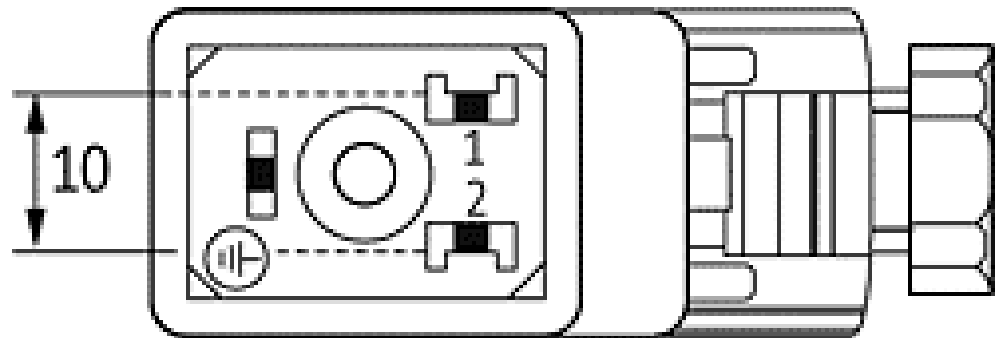

Circuit diagram

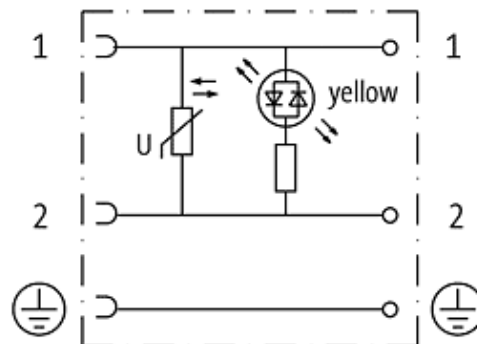

Representante oficial de:



[Argentina – Uruguay – Paraguay – Bolivia – Colombia – y Perú.]



Calle 49 N° 5764 - Villa Ballester (B1653AOX) - Prov. de Buenos Aires - ARGENTINA
Tel: (+54 11) 4768-4242 / Fax: (+54 11) 4849-1212
Mail: ventas@nakase.com.ar / Web: www.nakase.com.ar

