

MIRO GSM DI6 DO4R 230VAC IN: 110...240VDC OUT: DO4R 250VAC / 10A

DI6 DO4R - (Relay) 230 V AC
 INPUT: 230 V AC
 4 C/O contacts
 Screw terminals

Image

Vicarious picture

Approvals**Technical Data**

Operating voltage	230 V AC (110...240 V AC)
Operating current	approx. 10 mA
Connection diameter	Screw terminals: max. 2.5 mm ² (AWG 14)

Input

Connection voltage - current	230 V AC (110...240 V AC)
------------------------------	---------------------------

Output

Switching voltage	max. 250 V AC/DC
Switching current per output	max. 10 A
Total current	max. 20 A
Contact material	Ag Ni 90/10

General data

Protection	IP20
Mech./ elect. life	30 × 10 ⁶ /load dependent (for inductive loads we recommend interference suppression components connected parallel to the coil)
Housing	Plastic black
Temperature range	-25...+55 °C (storage temperature -40...+85 °C)
Mounting method	DIN-rail mountable (EN 60715) or screw fixing
Connection	Antenna SMA (max. cable length: 25 m)


All data on this data sheet was compiled carefully.

Liability regarding correctness, completeness, and actuality is limited to gross negligence. Created: 05/13


Commercial data

Net weight	260
Weight unit	gram
Basic unit	pc.
Customs tariff number	85176200
Unit (piece)	1
Minimum order quantity (piece)	1

Circuit diagram

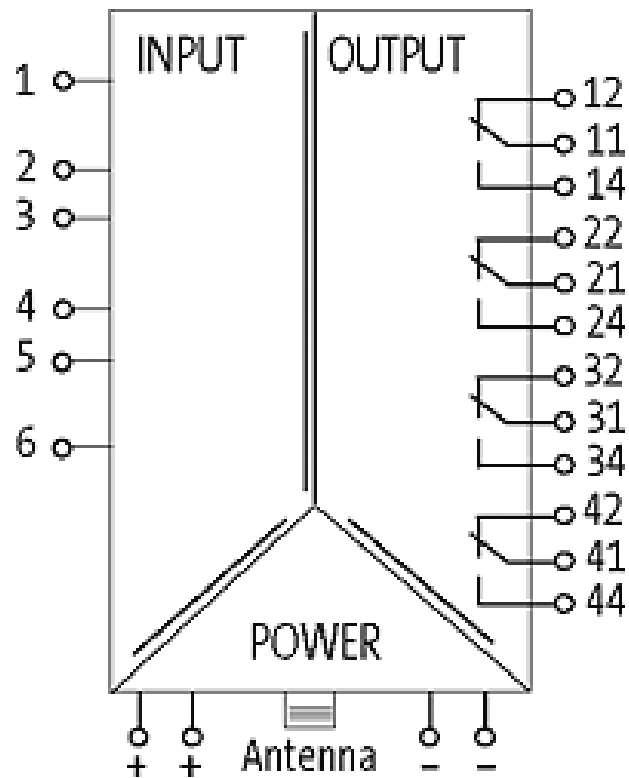

Dimension drawing

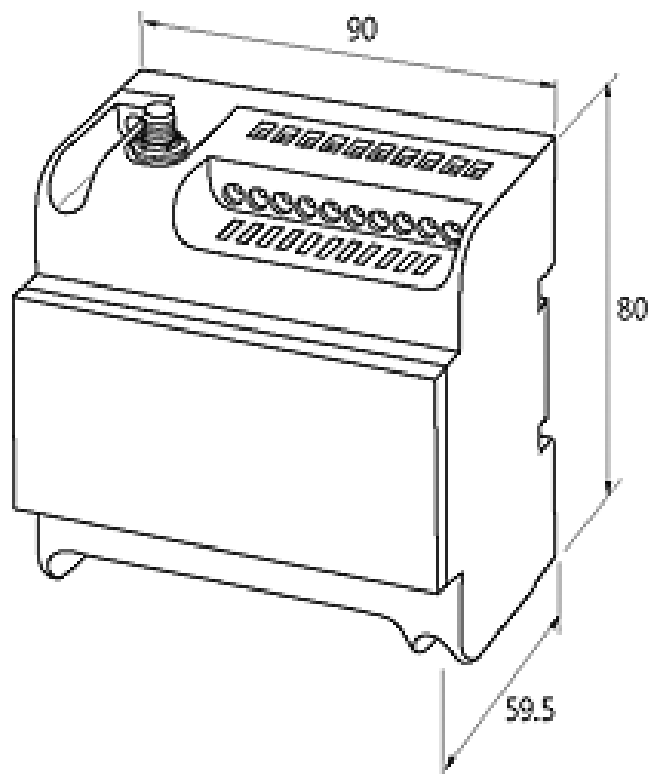

Representante oficial de:



[Argentina – Uruguay – Paraguay – Bolivia – Colombia – y Perú.]



Calle 49 N° 5764 - Villa Ballester (B1653AOX) - Prov. de Buenos Aires - ARGENTINA
Tel: (+54 11) 4768-4242 / Fax: (+54 11) 4849-1212
Mail: ventas@nakase.com.ar / Web: www.nakase.com.ar

